

Rix's Creek Coal Mine

*Environmental Noise Monitoring
October 2017*

*Prepared for
Rix's Creek Pty Limited*



Noise and Vibration Analysis and Solutions

Global Acoustics Pty Ltd
PO Box 3115 | Thornton NSW 2322
Telephone +61 2 4966 4333
Email global@globalacoustics.com.au
ABN 94 094 985 734

Rix's Creek Coal Mine

Environmental Noise Monitoring October 2017

Reference: 17408_R01

Report date: 7 November 2017

Prepared for

Rix's Creek Pty Limited
PO Box 4
East Maitland NSW 2323

Prepared by

Global Acoustics Pty Ltd
PO Box 3115
Thornton NSW 2322



Prepared: Joel Curran
Acoustics Consultant



QA Review: Katie Weekes
Acoustics Consultant

Global Acoustics Pty Ltd ~ Environmental noise modelling and impact assessment ~ Sound power testing ~ Noise control advice ~ Noise and vibration monitoring ~ OHS noise monitoring and advice ~ Expert evidence in Land and Environment and Compensation Courts ~ Architectural acoustics ~ Blasting assessments and monitoring ~ Noise management plans (NMP) ~ Sound level meter and noise logger sales and hire

EXECUTIVE SUMMARY

Global Acoustics was engaged by Rix's Creek Mine to conduct a noise survey around their operations, situated less than 10 kilometres north-west of Singleton, NSW. The mine comprises the original Rix's Creek Mine (RCM), now known as Rix's Creek South (RCS), and the former Integra Open Cut Project Mine, now known as Rix's Creek North (RCN).

Attended environmental noise monitoring described in this report was undertaken at eight locations on the night period of 12/13 October 2017. The duration of each measurement was 15 minutes.

The purpose of the survey was to quantify and describe the acoustic environment around both operations and compare results with noise criteria outlined in the Rix's Creek Noise Management Plan (NMP).

Operational Noise Assessment

Noise levels from RCM complied with relevant criteria at all monitoring locations during the October 2017 monitoring survey.

Wind speed and/or calculated temperature inversion conditions resulted in development consent criteria not being applicable at several locations.

Low Frequency Assessment

During October 2017, RCM complied with the relevant limits using the Broner, INP and dING methods of assessing low frequency noise at all monitoring locations.

Global Acoustics Pty Ltd

Table of Contents

1 INTRODUCTION.....	1
1.1 Background.....	1
1.2 Attended Noise Monitoring Locations.....	1
1.3 Terminology and Abbreviations.....	3
2 PROJECT CONSENT AND CRITERIA.....	4
2.1 Project Specific Criteria.....	4
2.2 Meteorological Conditions.....	4
2.3 Modifying Factors.....	5
2.3.1 Tonality, Intermittent and Impulsive Noise.....	5
2.4 Low Frequency Noise.....	5
2.4.1 Low Frequency Assessment Methods.....	6
3 METHODOLOGY.....	7
3.1 Overview.....	7
3.2 Attended Noise Monitoring.....	8
3.3 Meteorological Data.....	8
3.4 Modification Factors.....	9
3.5 Attended Noise Monitoring Equipment.....	9
4 RESULTS.....	10
4.1 Overall Noise Levels.....	10
4.2 Rix's Creek North.....	11
4.3 Rix's Creek South.....	13
4.4 Low Frequency Assessment.....	14
4.5 Measured Atmospheric Conditions.....	16
5 DISCUSSION.....	17
5.1 Noted Noise Sources.....	17
5.1.1 NM01 – 12 October 2017.....	19
5.1.2 NM02 – 12 October 2017.....	20
5.1.3 NM03 – 12 October 2017.....	21

5.1.4 NM04 – 12 October 2017.....	22
5.1.5 NM05 – 12 October 2017.....	23
5.1.6 NM06 – 12 October 2017.....	24
5.1.7 NM08 – 12 October 2017.....	25
6 SUMMARY OF COMPLIANCE.....	26
6.1 Operational Noise Assessment.....	26
6.2 Low Frequency Assessment.....	26

Appendices

A NOISE MANAGEMENT PLAN.....	27
B CALIBRATION CERTIFICATES.....	36

1 INTRODUCTION

1.1 Background

Global Acoustics was engaged by Rix's Creek Mine to conduct a noise survey around their operations, situated less than 10 kilometres north-west of Singleton, NSW. The mine comprises the original Rix's Creek Mine (RCM), now known as Rix's Creek South (RCS), and the former Integra Open Cut Project Mine, now known as Rix's Creek North (RCN).

The purpose of the survey was to quantify and describe the acoustic environment around both operations and compare results with noise criteria outlined in the Rix's Creek Noise Management Plan (NMP).

Environmental noise monitoring described in this report was undertaken during the night of 12/13 October 2017.

1.2 Attended Noise Monitoring Locations

In accordance with the NMP, there are a total of ten monitoring locations as detailed in Table 1.1 and shown on Figure 1. It should be noted that this figure shows the actual monitoring position, not the location of residences. Monitoring is not always undertaken at all locations during each month. Further explanation is provided in Section 3.2 of this report.

Table 1.1: ATTENDED NOISE MONITORING LOCATIONS

Location Descriptor ID	EA Reference (RCN/RCS) ¹	Owner or Area	Monitoring Location
NM1	132/171	Bowman	End of Glennie Street, Camberwell
NM2	91/NA	Olofsson	Glennie Creek Road, Camberwell
NM3	47/NA	Cherry	893 Middle Falbrook Road, Middle Falbrook
NM4	19/12	Andrews	997 Bridgman Road, Bridgman
NM5	11/8	Ferraro	788 Bridgman Road, Obanvale
NM6	145/19	Murray	427 Bridgman Road, Obanvale
NM7	NA/61	Gardiner Circuit	McMahon Way, Singleton Heights
NM8	NA/152	Belmadar Way	Cnr Belmadar Way and Maison Dieu Road, Maison Dieu
NM9	NA/121	Llanrian Drive	Llanrian Drive, Gowrie
NM10 ²	NA/135	Long Point	End of Dights Crossing Road, Maison Dieu

Notes:

1. NA indicates location was not included in the EA for that project; and
2. An offset correction has been applied to this measurement as the actual monitoring location is closer to RCM than the area it represents.

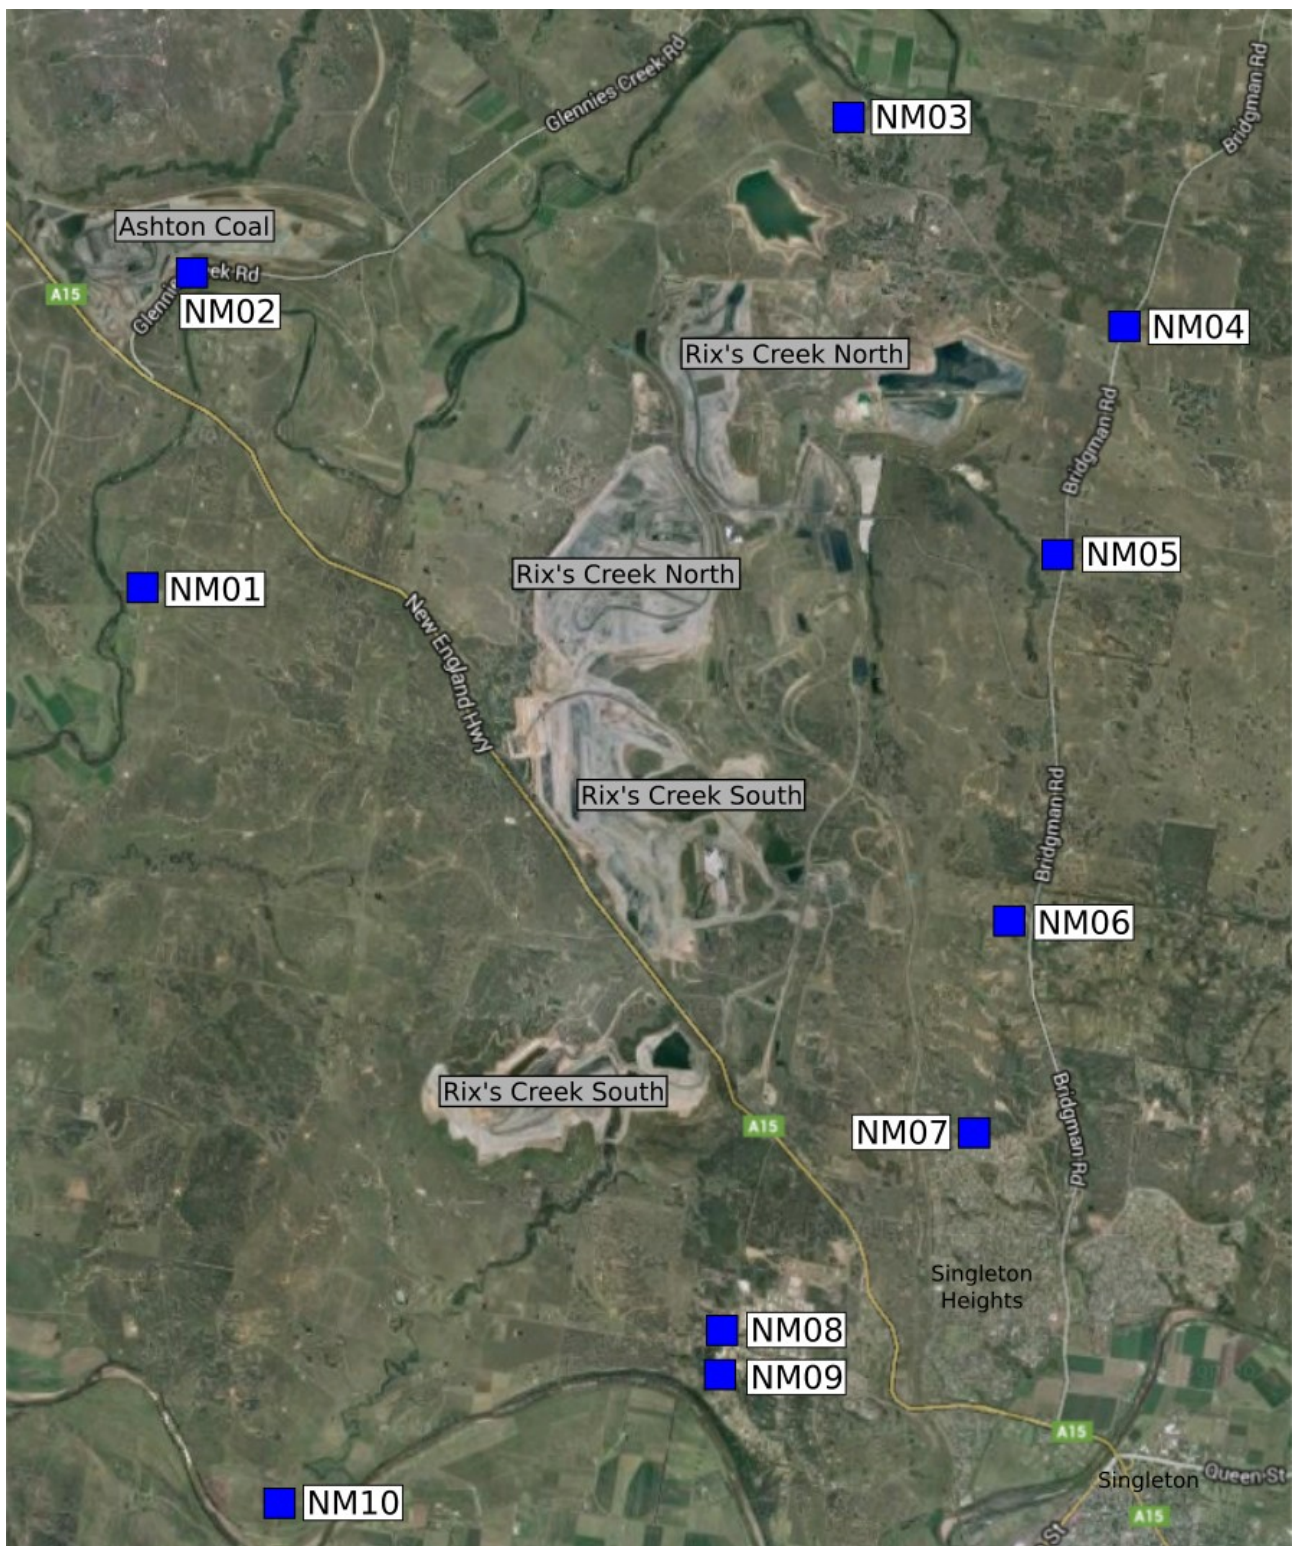


Figure 1: RCM Attended Noise Monitoring Locations

1.3 Terminology and Abbreviations

Some definitions of terms and abbreviations, which may be used in this report, are provided in Table 1.2.

Table 1.2: TERMINOLOGY AND ABBREVIATIONS

Descriptor	Definition
L _A	The A-weighted root mean squared (RMS) noise level at any instant
L _{Amax}	The maximum A-weighted noise level over a time period or for an event
L _{A1}	The noise level which is exceeded for 1 per cent of the time
L _{A10}	The noise level which is exceeded for 10 percent of the time, which is approximately the average of the maximum noise levels
L _{A50}	The noise level which is exceeded for 50 per cent of the time
L _{A90}	The level exceeded for 90 percent of the time, which is approximately the average of the minimum noise levels. The L _{A90} level is often referred to as the “background” noise level and is commonly used to determine noise criteria for assessment purposes.
L _{Amin}	The minimum A-weighted noise level over a time period or for an event
L _{Aeq}	The average noise energy during a measurement period
dB(A)	Noise level measurement units are decibels (dB). The “A” weighting scale is used to describe human response to noise
SPL	Sound pressure level (SPL), fluctuations in pressure measured as 10 times a logarithmic scale, the reference pressure being 20 micropascals
Hertz (Hz)	Cycles per second, the frequency of fluctuations in pressure, sound is usually a combination of many frequencies together
VTG	Vertical temperature gradient in degrees Celsius per 100 metres altitude
IA	Inaudible. When site only noise is noted as IA, there was no noise from the source of interest audible at the monitoring location
NM	Not Measurable. If site only noise is noted as NM, this means some noise from the source of interest was audible at low-levels, but could not be quantified
Day	This is the period 7:00am to 6:00pm
Evening	This is the period 6:00pm to 10:00pm
Night	This is the period 10:00pm to 7:00am

2 PROJECT CONSENT AND CRITERIA

2.1 Project Specific Criteria

Compliance criteria are detailed in Table 2.1 and sourced from Rix's Creek NMP, approved in February 2016. LAeq,15minute criteria are applicable for the day (0700 to 1800), evening (1800 to 2200) and night (2200 to 0700) periods. LA1,1minute criteria are applicable for the night period only.

As stated in the Rix's Creek NMP, attended monitoring is to be undertaken during the night only, with monitoring to commence at 9pm and results compared to all criteria.

Table 2.1: RIX'S CREEK IMPACT ASSESSMENT CRITERIA, dB

Location Descriptor ID	Rix's Creek North (RCN) ^{1,3}		Rix's Creek South (RCS) ^{1,3}	
	LAeq,15minute	LA1,1minute	LAeq,15minute	LA1,1minute
NM1	38	48	40	48
NM2	40	47	40	47 ²
NM3	39	45	NA	NA
NM4	37	49	42	48
NM5	41	47	42	48
NM6	36	48	42	47
NM7	NA	NA	40	45
NM8	NA	NA	40	47
NM9	NA	NA	40	47
NM10	NA	NA	40	47

Notes:

1. Criteria applicable for the night period only (10:00pm to 7:00am), however, as stated in the Rix's Creek NMP, attended monitoring undertaken during the night will commence at 9:00pm;
2. Criterion set as for Rix's Creek North in absence of data in EIS; and
3. NA indicates criteria not applicable at that location, as it was not included in the relevant EA, EIS, or Project Approval.

2.2 Meteorological Conditions

The RCM NMP and Environment Protection License (EPL 3391, December 2015) outlines required meteorological conditions for criteria to be applicable during attended noise monitoring:

L3.5 The noise emission limits identified in this licence apply under all meteorological conditions of:
a) Wind speeds up to 3m/s at 10 metres above the ground level; or
b) Temperature inversion conditions of up to 3oC/100m and wind speed up to 2m/s at 10 metres above the ground.

2.3 Modifying Factors

Noise monitoring and reporting is carried out in accordance with the Environment Protection Authority (EPA) 'Industrial Noise Policy' (INP). Chapter 4 of the INP deals specifically with modifying factors that may apply to industrial noise. The most common modifying factors are addressed in detail below.

2.3.1 Tonality, Intermittent and Impulsive Noise

As defined in the INP:

Tonal noise contains a prominent frequency and is characterised by a definite pitch.

Impulsive noise has high peaks of short duration and a sequence of such peaks.

Intermittent noise is characterised by the level suddenly dropping to the background noise levels several times during a measurement, with a noticeable change in noise level of at least 5 dB. Intermittent noise applies to night-time only.

Years of monitoring have indicated that noise levels from mining operations, particularly those levels measured at significant distances from the source, are relatively continuous. Given this, noise levels measured from RCM at the monitoring locations are unlikely to be intermittent. In addition, there is no equipment on site that is likely to generate tonal or impulsive noise as defined in the INP.

2.4 Low Frequency Noise

INP Method

As defined in the INP:

Low frequency noise contains major components within the low frequency range (20 Hz to 250 Hz) of the frequency spectrum.

As detailed in Chapter 4 of the INP, low frequency noise should be assessed by measuring the site only C-weighted and site only A-weighted level over the same time period. The correction/penalty of 5 dB is applied if the difference between the two levels is 15 dB or more.

Broner Method

Low frequency noise can also be assessed against criteria specified in the paper "A Simple Method for Low Frequency Noise Emission Assessment" (Broner JLFNV Vol29-1 pp1-14 2010). If the site only C-weighted noise level at a receptor exceeds the relevant modifying factor trigger, a 5 dB penalty (modifying factor) is added to measured levels. This method is included to provide a comparison with the INP method.

dING Method

Whilst the INP is the current document for assessment of industrial noise impact in NSW, the EPA has recently published the Draft Industrial Noise Guideline (dING), which is currently under review after a period of public consultation. The dING contains an alternate method of assessing low frequency noise to the INP, which is:

Measure/assess C-weighted and A-weighted $L_{eq,T}$ levels over the same time period. The low frequency noise modifying factor correction is to be applied where the C-A level exceeds 15 dB and:

- where any of the 1/3 octave noise levels in Table C2 are exceeded by **up to** 5 dB and cannot be mitigated, a 2 dBA positive adjustment to measured A weighted levels applies for the evening/night period; and*
- where any of the 1/3 octave noise levels in Table C2 are exceeded by **more than** 5 dB and cannot be mitigated, a 5 dBA positive adjustment to measured A weighted levels applies for the evening/night period and a 2 dBA positive adjustment applies for the daytime period.*

Table C2 of the dING is reproduced below:

Table C2: One-third octave low frequency noise thresholds

Hz/dB(Z)	One-third octave $L_{Zeq,15\text{minute}}$ threshold level												
f,Hz	10	12.5	16	20	25	31.5	40	50	63	80	100	125	160
dB(Z)	92	89	86	77	69	61	54	50	50	48	48	46	44

Note: dB(z) = decibel (Z-weighted); f,Hz = frequency in Hertz; Hz/dB(Z) = hertz per decibel (Z-weighted). For the assessment of low frequency noise, care should be taken to select a wind screen that has wind-induced noise characteristics at least 10 dB below the threshold values in Table C2 for wind speeds up to 5 metres per second. It is likely that high performance larger diameter wind screens (nominally 175 mm) will be required to achieve this performance (Hessler et.al. 2008). In any case, the performance of the wind screen and wind speeds at which data will be excluded needs to be stated.

Low frequency noise shall be assessed under the meteorological conditions under which noise limits would apply.

Measurements should be made between 1.2 and 1.5 metres above ground level unless otherwise approved through a planning instrument (consent/approval) or Environment Protection Licence and at locations nominated in the development consent or license.

Low frequency assessment methods are detailed in Table 2.2.

Table 2.2: LOW FREQUENCY ASSESSMENT METHODS AND MODIFYING FACTOR TRIGGERS

Assessment Method	Calculation Method
Broner, 2010	Site only L_{Ceq}
INP	Site only L_{Ceq} minus site only L_{Aeq}
dING	1. Site only L_{Ceq} minus site only L_{Aeq} 2. One third octave low frequency noise threshold

Triggers and penalties associated with each method are outlined in Section 2.4.

3 METHODOLOGY

3.1 Overview

Noise monitoring was conducted at the monitoring locations in accordance with the Environment Protection Authority 'Industrial Noise Policy' guidelines and Australian Standard AS 1055 'Acoustics, Description and Measurement of Environmental Noise'.

Attended monitoring is preferred to the use of noise loggers when determining compliance with prescribed limits; it allows an accurate determination of the contribution, if any, to measured noise levels by the source of interest, RCM.

If the exact contribution of the source of interest cannot be established, due to masking by other noise sources in a similar frequency range, but site noise levels are observed to be well below (more than 5 dB lower than) any relevant criterion, a maximum estimate of the potential contribution of the site might be made based on other measured site-only noise levels, for example, L_{A10} , L_{A50} or L_{A90} . This is generally expressed as a 'less than' quantity, such as <20 dB or <30 dB.

The terms 'Inaudible' (IA) or 'Not Measurable' (NM) may also be used in this report. When site noise is noted as IA, no site noise was audible at the monitoring location. When site noise is noted as NM, this means some noise was audible but could not be quantified. If site noise was NM due to masking but estimated to be significant in relation to a relevant criterion, we would employ methods as per the Industrial Noise Policy (e.g. measure closer and back calculate) to determine a value for reporting.

All sites noted as NM in this report are due to one or more of the following reasons:

- site noise levels were extremely low and unlikely, in many cases, to be even noticed;
- site noise levels were masked by another relatively loud noise source that is characteristic of the environment (e.g. breeze in foliage or continuous road traffic noise) that cannot be eliminated by moving closer; and/or
- it was not feasible or reasonable to employ INP methods such as move closer and back calculate. Cases may include, but are not limited to, rough terrain preventing closer measurement, addition/removal of significant source to receiver shielding caused by moving closer, and meteorological conditions where back calculation may not be accurate

A measurement of $L_{A1,1\text{minute}}$ corresponds to the highest noise level generated for 0.6 seconds during one minute. In practical terms this is the highest noise level emitted from a RCM noise source during the entire measurement period (i.e. the highest level of the worst minute during the 15-minute measurement).

3.2 Attended Noise Monitoring

Due to the number and distance between monitoring locations in the NMP, it is not possible to determine compliance at each individual residence. As a result a risk-based assessment has been adopted where attended noise monitoring targets locations where operational noise from RCM is likely to be highest. Residences surrounding RCM have been grouped generally according to the locality and local acoustic environment. These groups are referenced in the relevant EAs as Noise Assessment Groups (NAG).

Compliance monitoring is undertaken in accordance with the following procedure outlined in the NMP:

Compliance monitoring is to be conducted at locations indicated as being in the zone of meteorological enhancement by the predictive noise model. The procedure for determining which locations to monitor is as follows:

1. The acoustic consultant undertaking the monitoring will access the predictive model website for the site for the upcoming night shift. The model results will indicate graphically the predicted zone of meteorological enhancement;
2. A monitoring plan will be developed by the consultant for the upcoming night period. Locations are to include:
 - a. If a clear zone of meteorological enhancement is indicated, one location in the opposite direction to the zone of predicted enhancement, and, all locations located within the predicted zone of enhancement; and
 - b. If relatively neutral conditions are predicted with no clear zone of meteorological enhancement, the eight locations nearest the mine will be monitored. NM01, NM03 and NM10 would be excluded, as non-compliance at those locations in the absence of meteorological enhancement is unlikely due to distance from the Mine.
3. A minimum of six locations are to be monitored per night.

Once monitoring commences, the consultant will apply best judgment to either proceed with the original monitoring plan, or a modified plan if monitoring results justify a change.

Other relevant sections of the NMP regarding attended noise monitoring are provided in Appendix A.

3.3 Meteorological Data

One on-site Automatic Weather Station (AWS) is currently located within each of the RCS and RCN mining lease areas. Each complies with AS2923-1987 'Ambient Air – Guide for measurement of horizontal wind for air quality applications' and the INP. These automatic weather stations provide representative weather data for RCM including wind speed and direction, sigma theta, solar radiation, humidity, rainfall and temperature.

Weather data is used to determine the validity of noise monitoring results in accordance with the INP. Wind speed and rain data is used for this purpose. Extreme temperature inversions is considered G-class inversions, as determined by use of sigma theta and wind speed to categorise inversion strength, in accordance with Appendix E of the INP.

For the purpose of determining valid meteorological conditions for which noise criteria apply:

- The Rix's Creek South AWS will be used for assessment of Rix's Creek South; and
- The Rix's Creek North AWS will be used for assessment of Rix's Creek North.

3.4 Modification Factors

Years of monitoring have indicated that noise levels from mining operations, particularly those levels measured at significant distances from the source are relatively continuous. Given this, noise levels from RCM at the monitoring locations are unlikely to be intermittent or impulsive. In addition, there is no equipment on site at RCM that would generate impulsive noise as defined in the INP. However, low frequency noise from RCM has been addressed.

3.5 Attended Noise Monitoring Equipment

The equipment detailed in Table 3.1 was used to measure environmental noise levels. Calibration certificates are provided in Appendix B.

Table 3.1: ATTENDED NOISE MONITORING EQUIPMENT

Model	Serial Number	Calibration Due Date
Rion NA-28 sound level analyser	00370304	17/11/2018
Larson Davis CAL150 acoustic calibrator	3333	30/09/2018

4 RESULTS

On the night environmental monitoring was conducted, enhancement was predicted to the North and North-West. As a result, check monitoring was conducted at NM08 to the South, followed by monitoring at NM06, NM05, NM04, NM03, NM02 and NM01 (moving from the East through to the North and to the West).

4.1 Overall Noise Levels

Overall noise levels measured at each location during attended measurement are provided in Table 4.1. Discussion as to the noise sources responsible for these measured levels is provided in Chapter 5 of this report.

Table 4.1: MEASURED NOISE LEVELS – OCTOBER 2017¹

Location	Start Date and Time ²	L _{Amax} dB	L _{A1} dB	L _{A10} dB	L _{A50} dB	L _{Aeq} dB	L _{A90} dB	L _{Amin} dB	L _{Ceq} dB
NM01	12/10/2017 21:30	50	45	41	38	39	35	32	56
NM02	12/10/2017 21:56	58	52	47	42	44	38	35	60
NM03	12/10/2017 22:23	41	34	32	31	31	30	28	55
NM04	12/10/2017 22:48	50	35	30	28	29	26	24	52
NM05	12/10/2017 23:09	49	39	35	32	33	30	28	51
NM06	12/10/2017 23:35	62	58	48	32	45	25	23	50
NM08	12/10/2017 21:00	50	45	43	41	41	39	37	60

Notes:

1. Levels in this table are not necessarily the result of activity at RCM; and
2. All measurements are 15 minutes duration.

4.2 Rix's Creek North

Noise levels generated by activity at RCN are shown in Table 4.2 and Table 4.3. Table 4.2 compares measured levels with LAeq,15minute impact assessment criteria. Criteria are then applied if weather conditions are in accordance with relevant limits. Discussion as to the noise sources responsible for these measured levels is provided in Section 5 of this report.

Table 4.2: LAeq,15minute GENERATED BY RCN AGAINST IMPACT ASSESSMENT CRITERIA – OCTOBER 2017

Location	Start Date and Time	Wind Speed m/s	Wind Direction	VTG °C/100m ¹	LAeq,15min Criterion dB ⁶	Criterion Applies? ^{2,6}	RCN LAeq,15min dB ^{3,4,5}	Exceedance ⁶
NM01	12/10/2017 21:30	2.7	130	-1.0	38	Yes	IA	Nil
NM02	12/10/2017 21:56	2.1	138	-1.0	40	Yes	IA	Nil
NM03	12/10/2017 22:23	1.9	140	-1.0	39	Yes	NM	Nil
NM04	12/10/2017 22:48	2.1	131	-1.0	37	Yes	25	Nil
NM05	12/10/2017 23:09	2.0	130	-1.0	41	Yes	24	Nil
NM06	12/10/2017 23:35	1.8	147	-1.0	36	Yes	IA	Nil
NM08	12/10/2017 21:00	2.7	140	-1.0	NA	NA	IA	NA

Notes:

1. Sigma theta data used to calculate Vertical Temperature Gradient (VTG) in accordance with procedures outlined in the INP;
2. Noise emission criteria apply for winds up to 3 metres per second (at a height of 10 metres); or temperature inversion conditions up to 3°C/100m and wind speeds up to 2 metres per second;
3. These are results for RCN in the absence of all other noise sources;
4. NM denotes audible but not measurable, IA denotes inaudible;
5. Bold results in red are those greater than the relevant criterion (if applicable);
6. NA in criterion applies and exceedance columns mean atmospheric conditions outside conditions specified or limits not available for that location and so criterion is not applicable, NA in LAeq,15minute criterion column means criterion not specified for this location; and
7. An offset correction of -1.3dB has been applied to the measurement at NM09 where audible and measurable.

Table 4.3 compares measured levels with RCN L_{A1,1minute} impact assessment criteria. Criteria are then applied if weather conditions are in accordance with relevant limits.

Table 4.3: L_{A1,1minute} GENERATED BY RCN AGAINST IMPACT ASSESSMENT CRITERIA – OCTOBER 2017

Location	Start Date and Time	Wind Speed m/s	Wind Direction	VTG °C/100m ¹	L _{A1,1min} Criterion dB ⁶	Criterion Applies? ^{2,6}	RCN L _{A1,1min} dB ^{3,4,5}	Exceedance ⁶
NM01	12/10/2017 21:30	2.7	130	-1.0	48	Yes	IA	Nil
NM02	12/10/2017 21:56	2.1	138	-1.0	47	Yes	IA	Nil
NM03	12/10/2017 22:23	1.9	140	-1.0	45	Yes	NM	Nil
NM04	12/10/2017 22:48	2.1	131	-1.0	49	Yes	29	Nil
NM05	12/10/2017 23:09	2.0	130	-1.0	47	Yes	26	Nil
NM06	12/10/2017 23:35	1.8	147	-1.0	48	Yes	IA	Nil
NM08	12/10/2017 21:00	2.7	140	-1.0	NA	NA	IA	NA

Notes:

1. Sigma theta data used to calculate Vertical Temperature Gradient (VTG) in accordance with procedures detailed in the INP;
2. Noise emission criteria apply for winds up to 3 metres per second (at a height of 10 metres); or temperature inversion conditions up to 3°C/100m and wind speeds up to 2 metres per second;
3. These are results for RCN in the absence of all other noise sources;
4. NM denotes audible but not measurable, IA denotes inaudible;
5. Bold results in red are those greater than the relevant criterion (if applicable);
6. NA in criterion applies and exceedance columns mean atmospheric conditions outside conditions specified or limits not available for that location and so criterion is not applicable, NA in L_{Aeq,15minute} criterion column means criterion not specified for this location; and
7. An offset correction of -1.3dB has been applied to the measurement at NM09 where audible and measurable.

4.3 Rix's Creek South

Noise levels generated by activity at RCS are shown in Table 4.4 and Table 4.5. Table 4.4 compares measured levels with LAeq,15minute impact assessment criteria. Criteria are then applied if weather conditions are in accordance with relevant limits. Discussion as to the noise sources responsible for these measured levels is provided in Section 5 of this report.

Table 4.4: LAeq,15minute GENERATED BY RCS AGAINST IMPACT ASSESSMENT CRITERIA – OCTOBER 2017

Location	Start Date and Time	Wind Speed m/s	Wind Direction	VTG °C/100m ¹	LAeq,15min Criterion dB	Criterion Applies? ^{2,6}	RCS LAeq,15min dB ^{3,4,5}	Exceedance ⁶
NM01	12/10/2017 21:30	4.8	120	0.5	40	No	IA	NA
NM02	12/10/2017 21:56	4.2	124	0.5	40	No	NM	NA
NM03	12/10/2017 22:23	4.2	124	0.5	NA	NA	IA	NA
NM04	12/10/2017 22:48	4.5	120	0.5	42	No	IA	NA
NM05	12/10/2017 23:09	4.0	128	0.5	42	No	IA	NA
NM06	12/10/2017 23:35	4.2	130	0.5	42	No	NM	NA
NM08	12/10/2017 21:00	5.0	104	-1.0	40	No	<30	NA

Notes:

1. Sigma theta data used to calculate Vertical Temperature Gradient (VTG) in accordance with procedures detailed in the INP;
2. Noise emission criteria apply for winds up to 3 metres per second (at a height of 10 metres); or temperature inversion conditions up to 3°C/100m and wind speeds up to 2 metres per second;
3. These are results for RCS in the absence of all other noise sources;
4. NM denotes audible but not measurable, IA denotes inaudible;
5. Bold results in red are those greater than the relevant criterion (if applicable);
6. NA in criterion applies and exceedance columns mean atmospheric conditions outside conditions specified or limits not available for that location and so criterion is not applicable, NA in LAeq,15minute criterion column means criterion not specified for this location; and
7. An offset correction of -1.3dB has been applied to the measurement at NM09 where audible and measurable.

Table 4.5 compares measured levels with RCS L_{A1,1minute} impact assessment criteria. Criteria are then applied if weather conditions are in accordance with relevant limits.

Table 4.5: L_{A1,1minute} GENERATED BY RCS AGAINST IMPACT ASSESSMENT CRITERIA – OCTOBER 2017

Location	Start Date and Time	Wind Speed m/s	Wind Direction	VTG °C/100m ¹	L _{A1,1min} Criterion dB	Criterion Applies? ^{2,6}	RCS L _{A1,1min} dB ^{3,4,5}	Exceedance ⁶
NM01	12/10/2017 21:30	4.8	120	0.5	48	No	IA	NA
NM02	12/10/2017 21:56	4.2	124	0.5	47	No	NM	NA
NM03	12/10/2017 22:23	4.2	124	0.5	NA	NA	IA	NA
NM04	12/10/2017 22:48	4.5	120	0.5	48	No	IA	NA
NM05	12/10/2017 23:09	4.0	128	0.5	48	No	IA	NA
NM06	12/10/2017 23:35	4.2	130	0.5	47	No	NM	NA
NM08	12/10/2017 21:00	5.0	104	-1.0	47	No	<30	NA

Notes:

1. Sigma theta data used to calculate Vertical Temperature Gradient (VTG) in accordance with procedures detailed in the INP;
2. Noise emission criteria apply for winds up to 3 metres per second (at a height of 10 metres); or temperature inversion conditions up to 3°C/100m and wind speeds up to 2 metres per second;
3. These are results for RCS in the absence of all other noise sources;
4. NM denotes audible but not measurable, IA denotes inaudible;
5. Bold results in red are those greater than the relevant criterion (if applicable); and
6. NA in criterion applies and exceedance columns mean atmospheric conditions outside conditions specified or limits not available for that location and so criterion is not applicable, NA in L_{Aeq,15minute} criterion column means criterion not specified for this location; and
7. An offset correction of -1.3dB has been applied to the measurement at NM09 where audible and measurable.

4.4 Low Frequency Assessment

Low frequency results for each monitoring location are presented in Table 4.6. Where the results in Table 4.6 are greater than the INP, Broner, or dING low frequency modifying factor trigger due to activities at RCM a 5 dB modifying factor correction is applied to the measured noise level (if applicable).

Applicability of the low frequency correction is determined by a number of factors including whether or not RCM was measurable (not “inaudible”, “not measurable” or less than a maximum cut-off value of 30 dB), was within 5 dB of the relevant criterion, and where meteorological conditions resulted in criteria applying (in accordance with the EPL and project approval). The low frequency correction was not applicable to any measurements as detailed in Table 4.6.

Table 4.6: LOW FREQUENCY NOISE MODIFYING FACTOR ASSESSMENT – OCTOBER 2017

Location	Start Date and Time	INP		Broner		dING	
		Result ^{1,5} L _{Ceq} - L _{Aeq} dB RCN/RCS	Penalty dB RCN/RCS	Result ^{2,5} L _{Ceq} dB RCN/RCS	Penalty dB RCN/RCS	Result ^{3,5} Max exceedance of ref spectrum dB RCN/RCS	Penalty dB RCN/RCS
NM01	12/10/2017 21:30	NA/NA	0/0	NA/NA	0/0	NA/NA	0/0
NM02	12/10/2017 21:56	NA/NA	0/0	NA/NA	0/0	NA/NA	0/0
NM03	12/10/2017 22:23	NA/NA	0/0	NA/NA	0/0	NA/NA	0/0
NM04	12/10/2017 22:48	NA/NA	0/0	NA/NA	0/0	NA/NA	0/0
NM05	12/10/2017 23:09	NA/NA	0/0	NA/NA	0/0	NA/NA	0/0
NM06	12/10/2017 23:35	NA/NA	0/0	NA/NA	0/0	NA/NA	0/0
NM08	12/10/2017 21:00	NA/NA	0/0	NA/NA	0/0	NA/NA	0/0

Notes:

1. Low frequency modifying factor trigger is $L_{Ceq} - L_{Aeq} \geq 15$ dB as per the INP;
2. Night L_{Ceq} modifying factor trigger is L_{Ceq} 60 dB as per Broner (2010);
3. Low frequency modifying factor trigger is comparison of measured spectrum against a reference spectrum as per the dING;
4. Bold results and penalties in red are where the relevant modifying factor trigger was exceeded;
5. Where it is not possible to determine the site only result due to the presence of other low frequency noise sources occurring during the measurement, or where site only level is 5 dB or more less than criterion, this is noted as NA (not available) and no further assessment has been undertaken; and
6. Noise emission limits apply for winds up to 3 metres per second (at a height of 10 metres); or temperature inversion conditions up to 3°C/100m and wind speeds up to 2 metres per second. No further low frequency assessment undertaken where criterion do not apply due to meteorological conditions.

As detailed in Table 4.6, noise levels from RCM were either 5 dB or more below the relevant criterion, inaudible or it was not possible to determine the site only result due to the presence of other low frequency noise sources occurring during all measurements. No further assessment has been undertaken.

4.5 Measured Atmospheric Conditions

Atmospheric condition data measured by the operator at each location using a Kestrel hand-held weather meter is shown in Table 4.7. Atmospheric condition data is routinely recorded on a site-by-site basis to show conditions during the monitoring period. The wind speed, direction and temperature were measured at 1.8 metres.

Table 4.7: MEASURED ATMOSPHERIC CONDITIONS – OCTOBER 2017^{1,2}

Location	Start Date and Time	Temperature degrees C	Wind Speed m/s	Wind Direction Degrees	Cloud Cover 1/8s
NM01	12/10/2017 21:30	16	-	-	0
NM02	12/10/2017 21:56	18	-	-	0
NM03	12/10/2017 22:23	19	0.7	110	0
NM04	12/10/2017 22:48	17	-	-	0
NM05	12/10/2017 23:09	17	1.1	90	0
NM06	12/10/2017 23:35	18	-	-	0
NM08	12/10/2017 21:00	20	2.3	90	0

Notes:

1. Wind speed and direction measured at 1.8 metres; and
2. "-" indicates calm conditions.

Weather station data from RCN and RCS is used to determine compliance with specified noise criteria.

5 DISCUSSION

5.1 Noted Noise Sources


Table 4.1 to Table 4.5 present data gathered during attended monitoring. These noise levels are the result of many sounds reaching the sound level meter microphone during monitoring. Received levels from various noise sources were noted during attended monitoring and particular attention was paid to the extent of RCM's contribution, if any, to measured levels. At each receptor location, RCM's $L_{Aeq,15\text{minute}}$ and $L_{A1,1\text{minute}}$ (in the absence of any other noise) was, where possible, measured directly, or, determined by frequency analysis. Time variations of noise sources in each measurement, their temporal characteristics, are taken into account via statistical descriptors.

Other mines that may be audible at times are Ravensworth Complex, Hunter Valley Operations (HVO), Mount Thorley Warkworth (MTW), Ashton Coal and Wambo Coal mine (WCM).


From these observations summaries have been derived for each location in the following sections. Statistical 1/3 octave band analysis of environmental noise was undertaken, and the charts following in this section display the frequency ranges for various noise sources at each location for L_{A1} , L_{A10} , L_{A90} , and L_{Aeq} . These figures also provide, graphically, statistical information for these noise levels.

An example is provided as Figure 2 where it can be seen that frogs and insects are generating noise at frequencies above 1000 Hz; mining noise is at frequencies less than 1000 Hz (this is typical). Adding levels at frequencies that relate to mining only allows separate statistical results to be calculated. This analysis cannot always be performed if there are significant levels of other noise at the same frequencies as mining; this can be dogs, cows, or, most commonly, road traffic.

It should be noted that the method of summing statistical values up to a cut-off frequency can overstate the L_{A1} result by a small margin but is entirely accurate for L_{Aeq} .

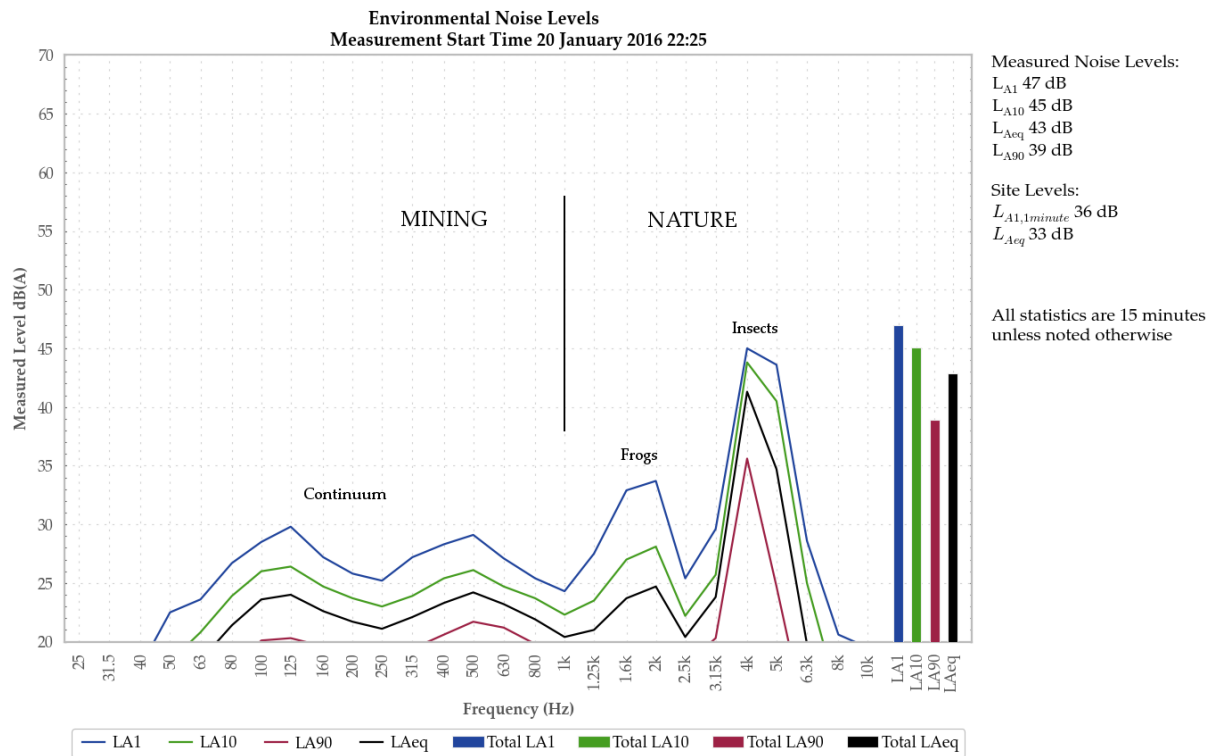

5.1.1 NM01 – 12 October 2017

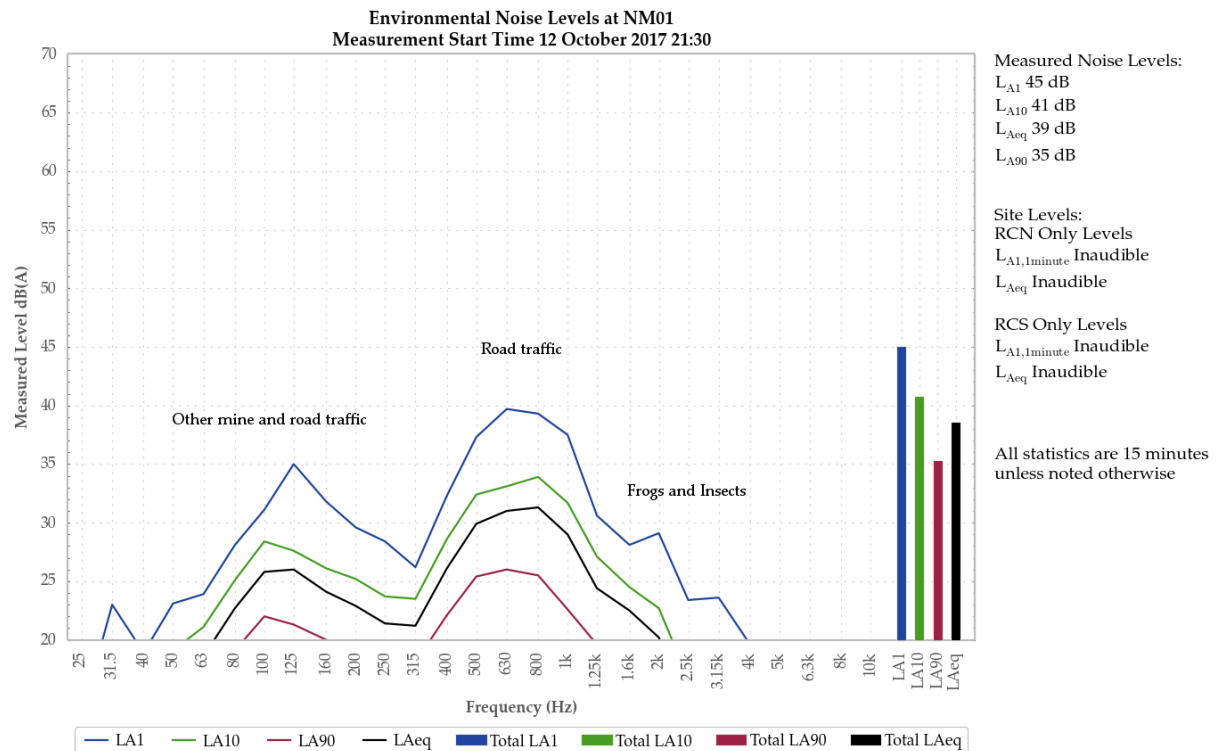


RCM was inaudible.

Road traffic generated measured levels.

Activities at other mines, insects, and frogs were also noted.

5.1.2 NM02 – 12 October 2017

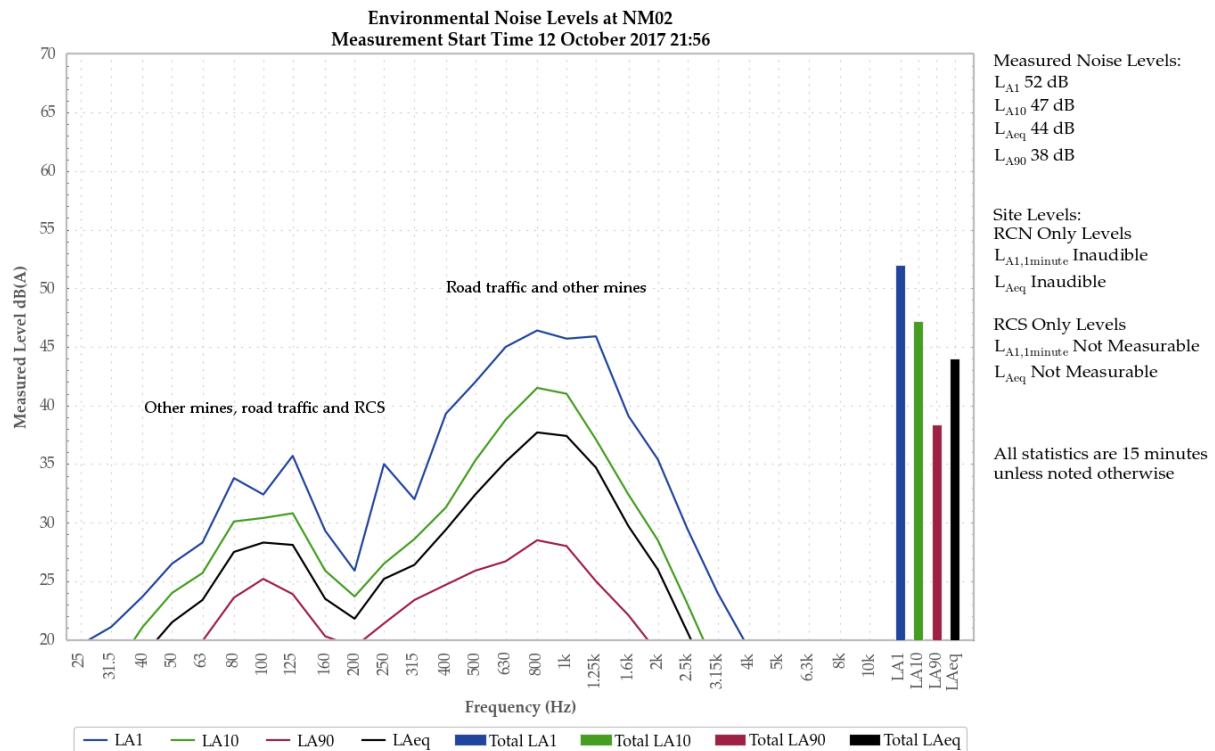


RCN was inaudible.

A low-level continuum from RCS was audible, but was not measurable.

Road traffic primarily generated all measured levels. Activities at other mines were also noted and contributed to the L_{A90} .

5.1.3 NM03 – 12 October 2017

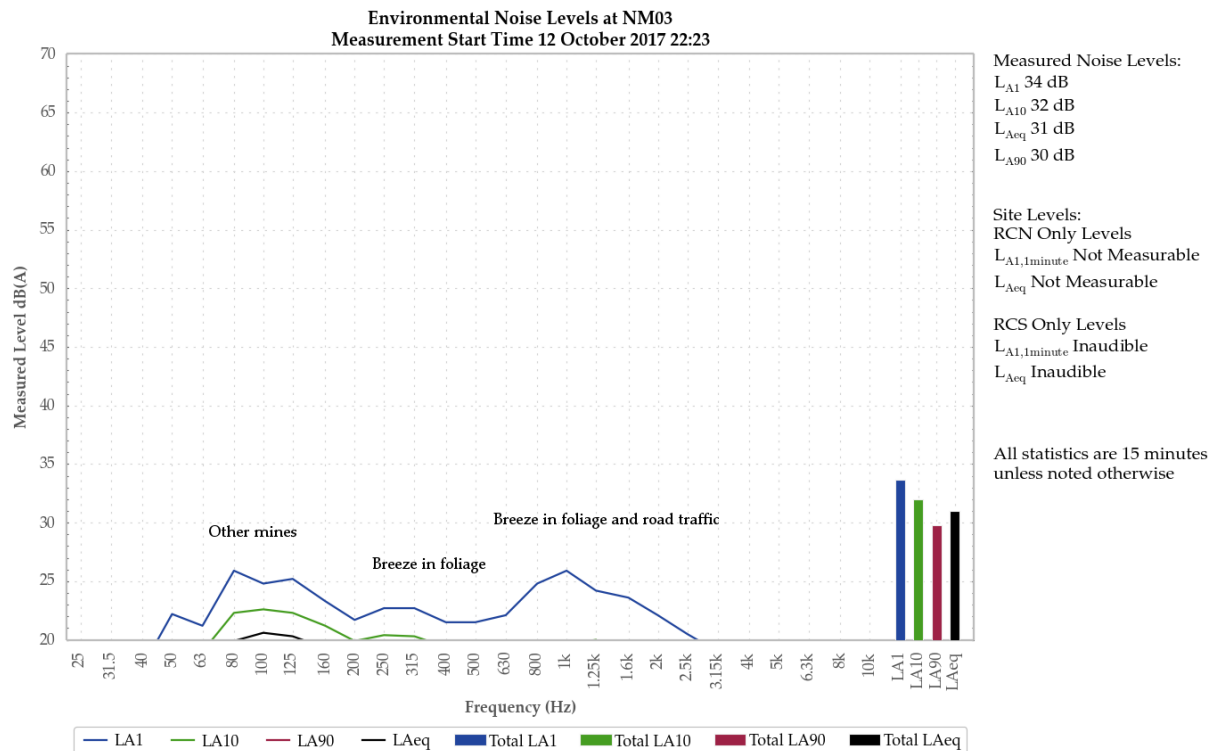


A low-level continuum from RCN was audible, but was not measurable.

RCS was inaudible.

Activities at other mines combined with breeze in foliage to generate all measured levels.

Road traffic was also noted.

5.1.4 NM04 – 12 October 2017

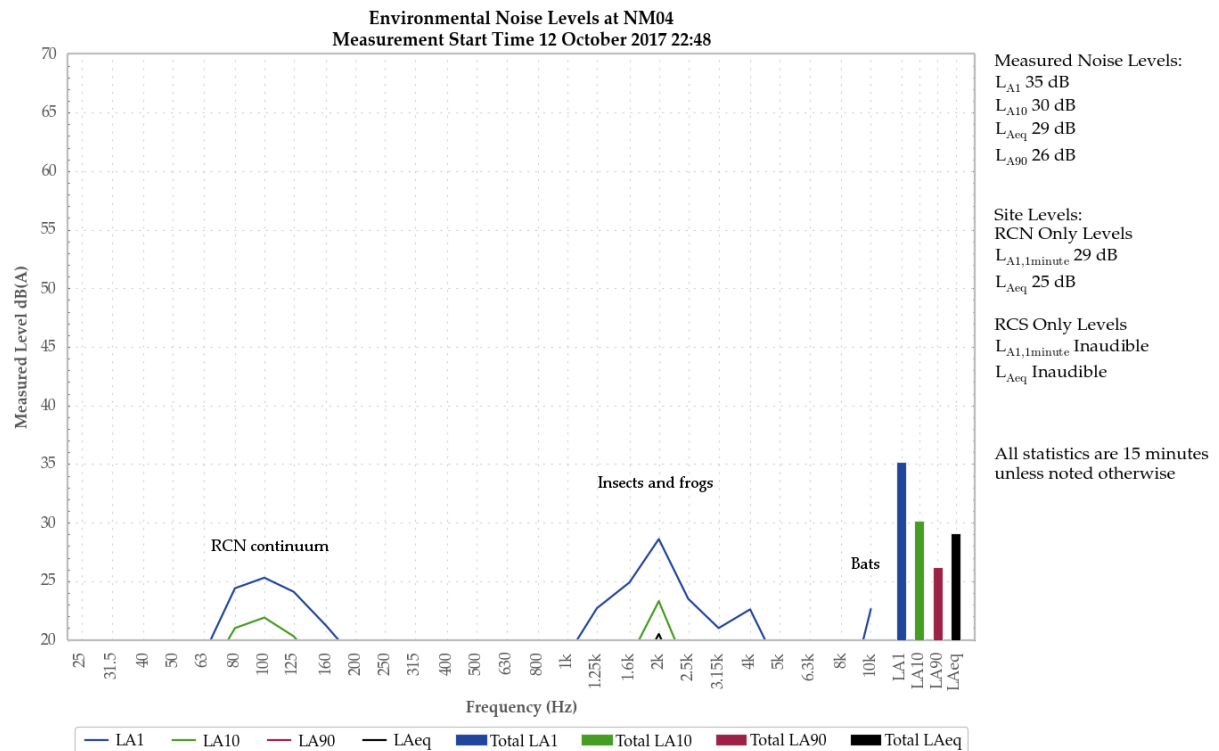


A low-level continuum from RCN was audible during the measurement and generated the site only L_{Aeq} of 25 dB. An exhaust surge generated the site only $L_{A1,1minute}$ of 29 dB.

RCS was inaudible.

RCN, insects, and frogs combined to generate the L_{A1} , L_{A10} , L_{Aeq} , and L_{A90} . Bats contributed to the L_{A1} .

5.1.5 NM05 – 12 October 2017

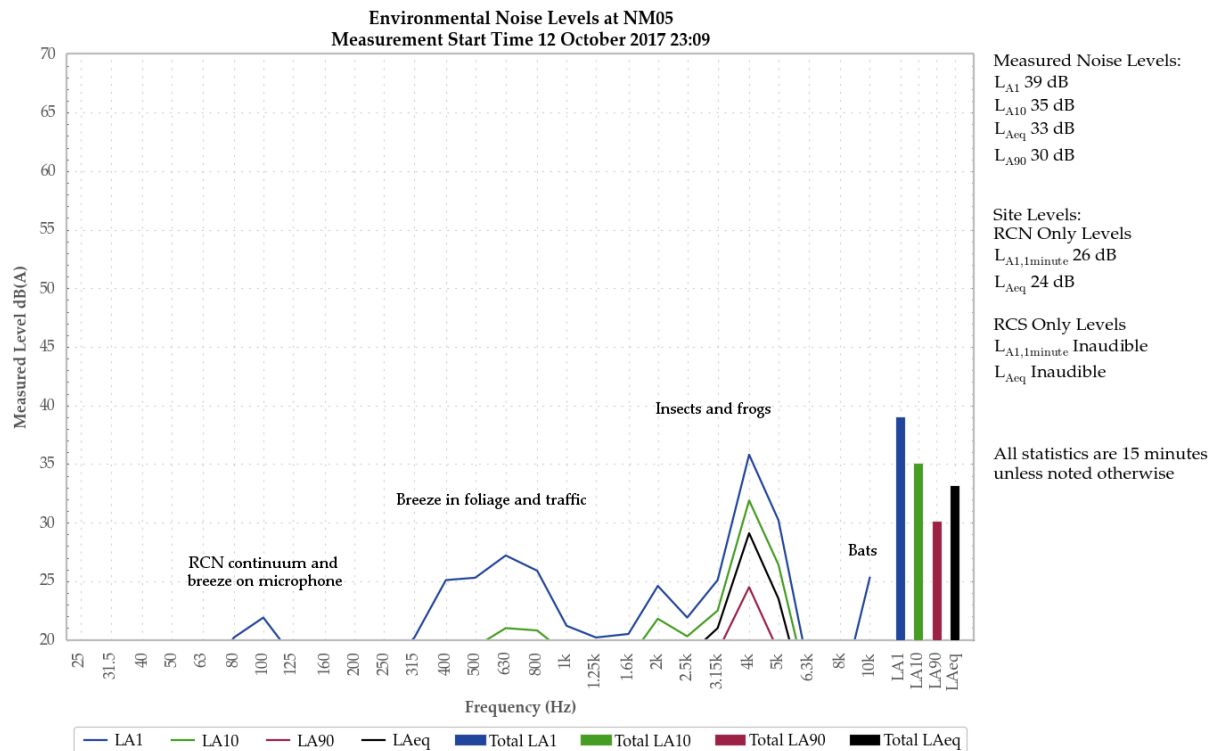


A low-level continuum from RCN was audible during the measurement, generating the site only L_{Aeq} of 24 dB. Impact noise generated the site only $L_{A1,1minute}$ of 26 dB.

RCS was inaudible.

Insects and frogs were responsible for measured levels.

Road traffic, breeze in foliage and bats were also noted.

5.1.6 NM06 – 12 October 2017

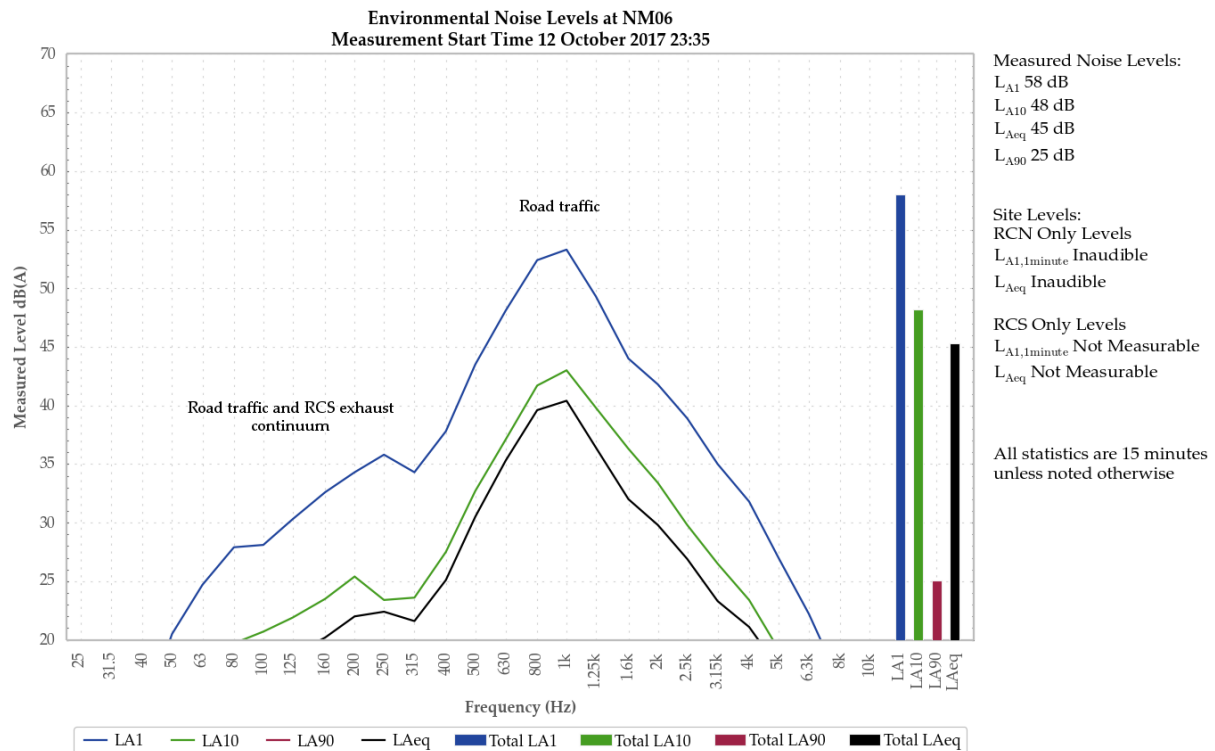


RCN was inaudible.

A low-level exhaust continuum from RCS was audible, but was not measurable.

Road traffic generated the L_{A1} , L_{A10} and L_{Aeq} . Insects and frogs generated the L_{A90} .

5.1.7 NM08 – 12 October 2017

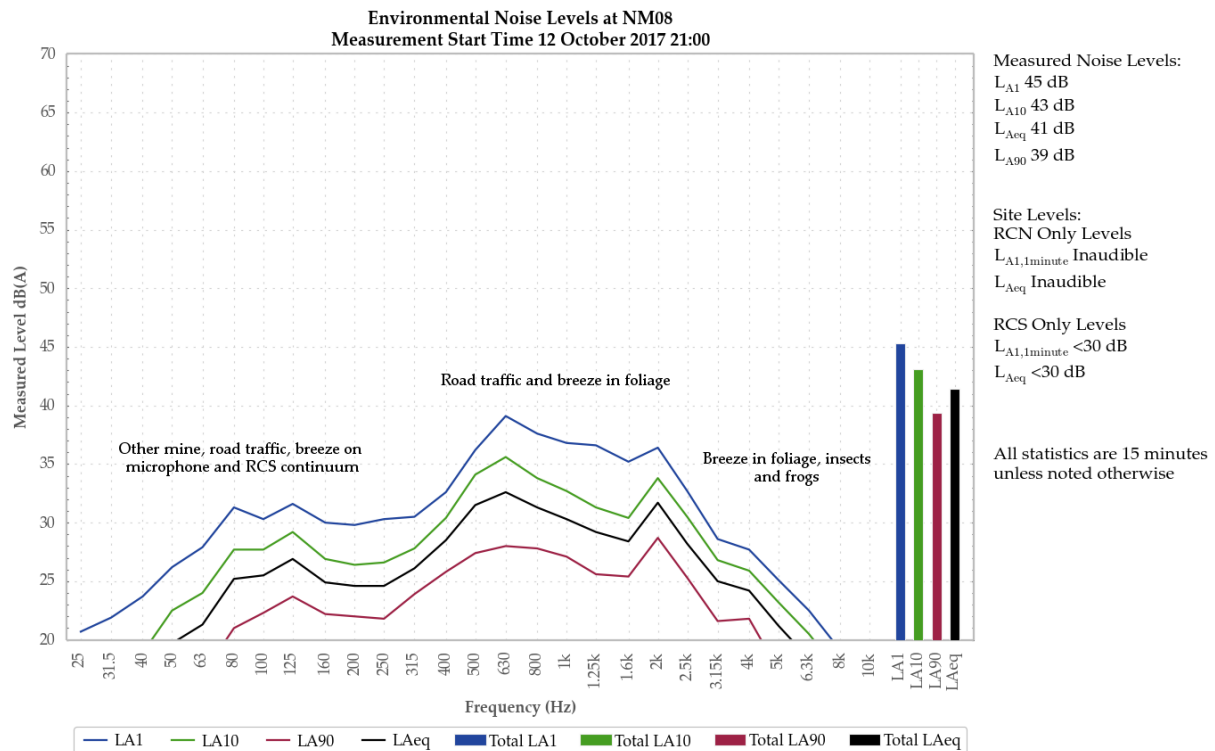

RCN was inaudible.

A low-level continuum from RCS was audible during the measurement, generating the site only L_{Aeq} and $L_{A1,1minute}$ of less than 30 dB.

Road traffic, breeze in foliage and breeze on the microphone generated all measured levels.

Noise from another mine, insects and frogs were also noted.

6 SUMMARY OF COMPLIANCE

Global Acoustics were engaged by Rix's Creek Mine to conduct a noise survey around their operations, situated north-west of the town of Singleton, NSW. The mine comprises the original Rix's Creek Mine, now known as Rix's Creek South (RCS), and the former Integra Open Cut Project Mine, now known as Rix's Creek North (RCN).

Environmental noise monitoring described in this report was undertaken during the night of 12/13 October 2017.

The purpose of the survey was to quantify and describe the acoustic environment around both operations and compare results with noise criteria outlined in the Rix's Creek Noise Management Plan (NMP).

6.1 Operational Noise Assessment

Noise levels from RCM complied with relevant criteria at all monitoring locations during the October 2017 monitoring survey.

Wind speed and/or estimated temperature inversion conditions resulted in development consent criteria not being applicable at several locations.

6.2 Low Frequency Assessment

During October 2017, RCM complied with the relevant limits using the Broner, INP and dING methods of assessing low frequency noise at all monitoring locations.

Global Acoustics Pty Ltd

APPENDIX

A ***NOISE MANAGEMENT PLAN***

5. Attended Noise Compliance Monitoring

5.1.1 INTRODUCTION

Attended monitoring is required to assess compliance with regulatory limits. Note: As described in this document it does not address the 25% of privately owned land aspect of Schedule 3, Condition 2 of the Rixs Creek North Cut Project Approval. As recommended in the 2011 Independent Environmental Audit, the requirement to assess affectation of 25% of privately owned land should be removed as a requirement (for all criteria); it is not practical to determine and has no relevance to resident amenity.

Attended monitoring at all receptor locations will be at night only commencing from 9pm, with results compared to all criteria (day, evening and night). Atmospheric conditions and noise propagation are usually the same on the evening/night and night/day time boundaries. Note also that receptors near to, or exposed to, the New England Highway have a completely different noise environment in the day due to traffic such that mining noise is unlikely to be a problem. This is consistent with the Independent Review Of Cumulative Noise Impacts -Camberwell Village (WMPL, May 2010), which states:

The LAeq levels near the New England Highway are predominately due to road traffic and associated heavy vehicles, rather than mining or other industrial noise, and is unlikely to decrease in the future.

5.1.2 FREQUENCY

Attended compliance monitoring is to be undertaken one night per calendar month.

5.1.3 LOCATIONS

Compliance cannot be determined at each individual resident so on the monitoring night monitoring is targeted to locations where operational noise is likely to be the highest. These monitoring locations are selected by the following procedure.

Residences surrounding the Mine have been grouped generally according to the locality and local acoustic environment. These groupings are referenced in the relevant EAs as Noise Assessment Groups (NAG). Monitoring locations, including the receptor reference numbers from the relevant EAs and the NAG each represents, are listed in Table 5-6.

Compliance monitoring is to be conducted at locations indicated as being in the zone of meteorological enhancement by the predictive noise model. The procedure for determining which locations to monitor is as follows:

1. The acoustic consultant undertaking the monitoring will access the predictive model website for the site for the upcoming night shift. The model results will indicate graphically the predicted zone of meteorological enhancement;
2. A monitoring plan will be developed by the consultant for the upcoming night period. Locations are to include:
 - a. If a clear zone of meteorological enhancement is indicated, one location in the opposite direction to the zone of predicted enhancement, and, all locations located within the predicted zone of enhancement; and

- b. If relatively neutral conditions are predicted with no clear zone of meteorological enhancement, the eight locations nearest the mine will be monitored. NM01, NM03 and NM10 would be excluded, as non-compliance at those locations in the absence of meteorological enhancement is unlikely due to distance from the Mine.

3. A minimum of six locations are to be monitored per night.

Once monitoring commences, the consultant will apply best judgment to either proceed with the original monitoring plan, or a modified plan if monitoring results justify a change.

The procedure for monitoring when a clear zone of meteorological enhancement is predicted is:

1. The first monitoring location will be the potentially most affected location in the opposite direction to the zone of predicted enhancement to confirm noise emission in that direction is well below compliance criteria;
2. If the Mine L_{Aeq} is more than 2 dB below the relevant criterion at the first location ($L_{Aeq} < \text{criterion minus 2 dB}$), the consultant will proceed with the original plan and move to the locations within the predicted zone of enhancement;
3. If the Mine L_{Aeq} is within 2 dB of the relevant criterion ($L_{Aeq} \geq \text{criterion minus 2 dB}$), the consultant will monitor at the next most potentially affected location in the same general direction from the Mine. This procedure will be repeated until the Mine L_{Aeq} is more than 2 dB below the relevant criterion. Result acceptance procedures in Section 5.1.7 will be applied;
4. The consultant will then proceed with the original plan; and
5. If fatigue management rules result in insufficient time to monitor all locations, the consultant will apply best judgement to determine which locations will provide the best indication of compliance with the time available.

The procedure for monitoring when no clear zone of meteorological enhancement is predicted is:

1. The first monitoring location will be the potentially most affected location based on forecast and prevailing meteorological conditions;
2. If compliance is demonstrated, the consultant will proceed with the original plan;
3. If non-compliance is measured at any location, result acceptance procedures in Section 5.1.7 will be applied. Any locations in the same general direction from the Mine that were omitted in the original plan will be included; and
4. If fatigue management rules result in insufficient time to monitor all locations, the consultant will apply best judgement to determine which locations will provide the best indication of compliance with the time available.

The consultant shall maintain a fatigue management policy, which will be provided to the Mine and/or regulators on request.

Table 5-6 Attended Monitoring Locations

NMP ID	EA Ref. (ICO/RCM) ¹	Owner or Area	NAG ²
NM01	132/171	Bowman	6 (ICO) / M (RCM)
NM02	91/NA	Olofsson	4 (ICO)
NM03	47/NA	Cherry	B, C, F, 1, 6 and 12 (ICO)
NM04	19/12	Andrews	11 and A (ICO) / A (RCM)
NM05	11/8	Ferraro	10 and 11 (ICO) / A (RCM)
NM06	145/19	Murray	9 (ICO) / B and C (RCM)
NM07	NA/61	Gardiner Circuit	8 (ICO) / D and E (RCM)
NM08	NA/152	Belmadar Way	NA / J, G and F (RCM)
NM09	NA/121	Llanrian Drive	NA / H (RCM)
NM10	NA/135	Long Point	NA / K and I (RCM)

Notes: 1. NA indicates location was not included in the EA for that project; and
2. Indicates the NAG reference the location represents from the relevant EAs.

Figure 5-1 illustrates attended monitoring locations.

5.1.4 METHODS

Attended monitoring is to be conducted in accordance with the 'Industrial Noise Policy' (INP) guidelines and Australian Standard AS 1055 'Acoustics, Description and Measurement of Environmental Noise'. The duration of each measurement is to be 15 minutes.

As indicated in L3.3, L3.4 & L3.5 of EPL 3391:

L3.3 Noise from the premises is to be measured at the most affected point within the residential boundary, or at the most affected point within 30 metres of the dwelling where the dwelling is more than 30 metres from the boundary, to determine compliance with the noise level limits in this licence unless otherwise stated.

Where it can be demonstrated that direct measurement of noise from the premises is impractical, the EPA may accept alternative means of determining compliance. See Chapter 11 of the NSW Industrial Noise Policy.

The modification factors presented in Section 4 of the NSW Industrial Noise Policy shall also be applied to the measured noise levels where applicable.

L3.4 Noise from the premises is to be measured at 1 m from the dwelling facade to determine compliance with the LA1(1minute) noise limits in this licence.

*L3.5 The noise emission limits identified in this licence apply under all meteorological conditions of:
a) Wind speeds up to 3m/s at 10 metres above the ground level; or*

b) Temperature inversion conditions of up to 3oC/100m and wind speed up to 2m/s at 10 metres above the ground.

In most cases, monitoring near the residence is impractical due to barking dogs or issues with obtaining access. In all cases, measurements are to be undertaken at a suitable and representative location.

Some measurement results may be inconclusive and reported as "Inaudible" (IA) or "Not Measurable" (NM). When site noise is noted as IA then there was no site noise at the monitoring location. However, if site noise is noted as NM, this means some noise was audible but could not be quantified. This means that noise from the site was either very low, or, being masked by other noise that was relatively loud. In the former case (very low site levels) it is not considered necessary to attempt to accurately quantify site NM noise as it would be significantly less than any criterion and most unlikely to cause annoyance (and in many cases, to be even noticed).

If site noise were NM due to masking then suitable methods must be employed as per the Industrial Noise Policy (e.g. measure closer and back calculate) to determine a value for assessment of compliance.

As indicated in the notes below Table 2 of the Rixs Creek North Project Approval:

Noise generated by the projects is to be measured in accordance with the relevant procedures and exemptions (including certain meteorological conditions), of the NSW Industrial Noise Policy.

The procedures and exemptions will include the assessment of modifying factors from Section 4 of the INP, where applicable. Years of monitoring have indicated that noise levels from mining operations, particularly those levels measured at significant distances from the source are relatively continuous. Given this, noise levels at the monitoring locations are unlikely to be intermittent or impulsive. However, tonality and low frequency are to be assessed by analysis of the measured LAeq and/or LCeq spectrum.

5.1.5 METEOROLOGICAL MONITORING

One on-site Automatic Weather Station (AWS) is currently located within each of the Rixs Creek South and Rixs Creek North mining lease areas. Each complies with AS2923-1987 Ambient Air – Guide for measurement of horizontal wind for air quality applications and the INP. These AWS provide representative weather data for the Mine including wind speed and direction, sigma theta, solar radiation, humidity, rainfall and temperature. Weather data will be used to determine the validity of noise monitoring results in accordance with the INP. Wind speed and rain data will be used for this purpose. Extreme temperature inversions will be considered G-class inversions, as determined by use of sigma theta and wind speed to categorise inversion strength, in accordance with Appendix E of the INP.

For the purpose of determining valid meteorological conditions for which noise criteria apply:

- The Rixs Creek South AWS will be used for assessment of Rixs Creek South; and
- The Rixs Creek North AWS will be used for assessment of Rix's Creek North.

5.1.6 DATA TO BE COLLECTED

Data shall be collected in 15 minute periods and the Mine only LAeq result recorded. Low pass filtering will be used to remove extraneous noise such as insects when applicable. Other extraneous noise may be paused from the data set or excluded by other means. Statistical data must be one-third octave.

Assessment of impact is to include consideration of mining activity and atmospheric conditions during each measurement. Wind speed and/or estimated temperature inversion conditions may result in regulatory criteria not being applicable in accordance with the INP.

The Mine only L_{Ceq} result should be collected simultaneously. Low pass filtering will be used to remove extraneous high spectrum noise when required

A low frequency noise penalty of 5 dB is to be added to the Mine only L_{Aeq} result when noise from the mine causes:

- The Mine only C weighted reading to exceed L_{Ceq} 65 dB during the day or evening periods; or
- The Mine only C weighted reading to exceed L_{Ceq} 60 dB during the night period.

The following information must be recorded during attended noise monitoring:

- Time and date;
- Location;
- Name of person carrying out the monitoring;
- Serial number of equipment used;
- Noted sources and noise levels, direction and frequency from source of interest;
- Duration of monitoring;
- Measured noise levels including L_{Aeq} , L_{Amax} , L_{Amin} , L_{A1} , L_{A10} , L_{A50} and L_{A90} , and
- Weather conditions including temperature, relative humidity, wind speed average, wind speed maximum, wind direction and estimated cloud cover.

5.1.7 RESULT ACCEPTANCE

A 15 minute measurement shall be taken and assessed against the applicable criterion. If the Mine only L_{Aeq} result is below the criterion, then the consultant will record it, note the site has passed and move on to the next monitoring location.

If the Mine only L_{Aeq} result exceeds the criterion, is attributable to the Mine, and taken in valid meteorological conditions, then the following steps are to be followed:

1. Consultant will record the reading, advise the Mine of the criterion exceedance and proceed to Step 2. The Mine will implement remedial action as required.
2. Within 75 minutes after the first measurement (and no earlier than 10pm) a second 15 minute measurement is to be made. If this second result exceeds the criterion then proceed to Step 3, otherwise proceed to Step 4.
3. If the result is attributable to the Mine and taken in valid meteorological conditions then proceed to Step 5.
4. The consultant will record the result, note the site has passed, schedule an additional monitoring test to be undertaken at the location within 1 week, and move on to the next monitoring location.
5. The consultant will record the result, note the site has failed and is deemed a '*noise affected night*' at that location. An additional monitoring test should be scheduled to be undertaken at the same location within 1 week, and move on to the next monitoring location.

If the Mine only L_{Aeq} result exceeds the criterion, is attributable to the Mine, and taken in invalid meteorological conditions, the consultant will record it, advise the Mine a measurement has exceeded the criterion, and move on to the next monitoring location.

As detailed in Section 6.2.3 of this NMP, the OCE is to be advised of any potential noise exceedance detected during attended monitoring. The flow chart in Figure 6-5 details the attended monitoring exceedance procedure.

5.1.8 COMPLIANCE CRITERIA

Table 5-7 sets out night period noise compliance criteria. Rixs Creek North criteria are sourced from the Project Approval. Rixs Creek South $L_{Aeq,15minute}$ intrusive noise criteria are based on proposed criteria nominated in the EIS. $L_{A1,1minute}$ criteria are based on sleep disturbance criteria for the relevant NAG derived in the EIS.

$L_{Aeq,15minute}$ criteria are applicable for the day (07:00 to 18:00), evening (18:00 to 22:00) and night (22:00 to 07:00) periods. $L_{A1,1minute}$ criteria are applicable for the night period only.

Table 5-7 Compliance Criteria

NMP ID	EA Ref. (ICO/RCM) ¹	Rix's Creek North		Rixs Creek South	
		$L_{Aeq,15minute}$ dB	$L_{A1,1minute}$ dB	$L_{Aeq,15minute}$ dB	$L_{A1,1minute}$ dB
NM01	132/171	38	48	40	48
NM02	91/NA	40	47	40	47 ¹
NM03	47/NA	39	45	NA	NA
NM04	19/12	37	49	42	48
NM05	11/8	41	47	42	48
NM06	145/19	36	48	42	47
NM07	NA/61	NA	NA	40	45
NM08	NA/152	NA	NA	40	47
NM09	NA/121	NA	NA	40	47
NM10	NA/135	NA	NA	40	47

Notes: 1. Criterion set as for Rixs Creek North in the absence of data in the EIS; and

2. NA indicates criteria not applicable at that location, as it was not included in the relevant EA, EIS or Project Approval.

5.1.9 REPORTING

Attended monitoring reports should include a comparison to criteria detailed in the relevant project approval. All attended measurement result analysis should consider criteria applicability (for impact,

mitigation, cumulative and acquisition criteria) with regard to wind speed and vertical temperature gradient.

All results that exceed criteria, including instances where the second measurement indicates compliance with criteria, shall be reported to DP&E the following day along with actions taken to reduce the noise.

All monitoring that results in a night being deemed a '*noise affected night*' in accordance with Section 5.1.7 shall be reported to DP&E and the affected community as per the notification requirements.

5.1.10 EXCEEDANCE PROCEDURE

.Procedures to be followed in the event of a measured noise exceedance are outlined in Section 6.2.3

6.2.3 ATTENDED COMPLIANCE MONITORING EXCEEDANCE MEASURED

Any exceedance of a noise criterion is to be acted upon immediately it is measured. The acoustic consultant undertaking attended monitoring is to contact the Mine to advice of the problem and discuss possible changes to operations that should lead to compliance. A remeasure is required to evaluate the effectiveness of any change implemented as outlined in Section 5.1.7, if the measurement was made in valid meteorological conditions. The Senior Environmental Officer and/or the Environmental Officer should also be advised of the exceedance.

Responsibility: Noise Monitoring Consultant

Timing: Each event

The Department of Planning & Environment (Singleton Compliance Branch) and/or the Environment Protection Authority is to be informed of any noise criterion exceedance.

Responsibility: Senior Environmental Officer or Environmental Officer


Timing: Each event

This Noise Management Plan is to be issued to any consultant conducting attended noise monitoring for the site so they understand all relevant procedures.

Responsibility: Environmental Officer

Timing: On commencement of contract and every time this document is updated.

Figure 6-5 Attended Monitoring Exceedance Procedure

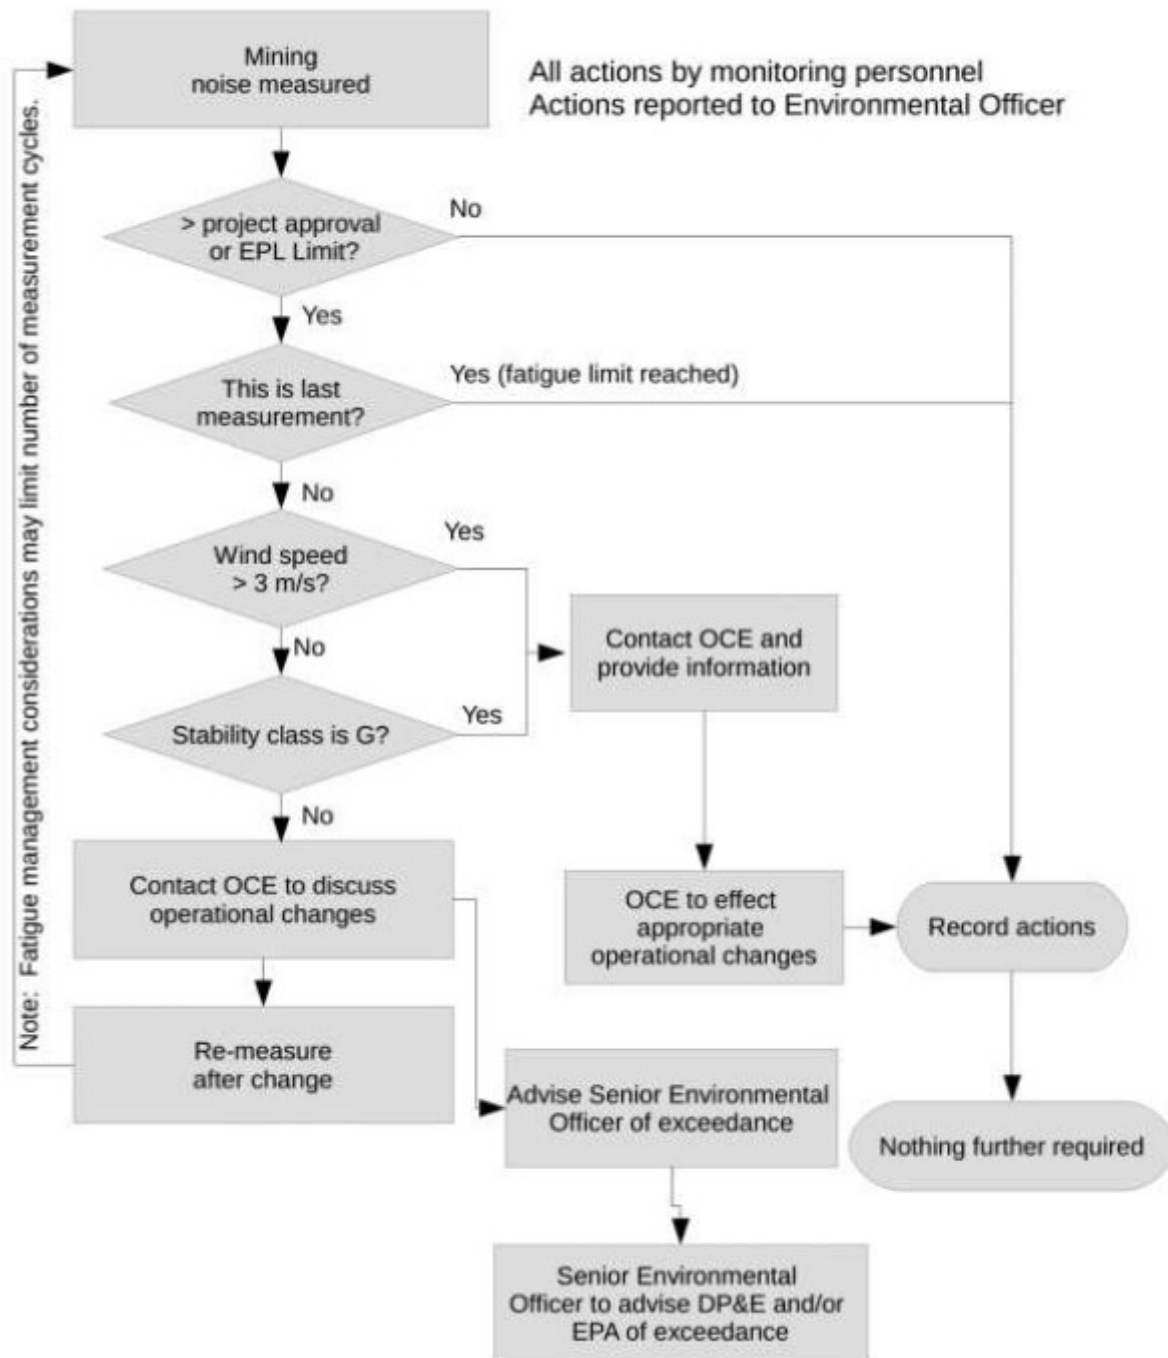

APPENDIX

B ***CALIBRATION CERTIFICATES***



**Acoustic
Research
Labs Pty Ltd**

Level 7 Building 2 423 Pennant Hills Rd
Pennant Hills NSW AUSTRALIA 2120
Ph: +61 2 9484 0800 A.B.N. 65 160 399 119
www.acousticresearch.com.au

Octave Band Filter
AS 4476:1997
Calibration Certificate

Calibration Number C16643A

Client Details Global Acoustics Pty Ltd
12/16 Huntingdale Drive
THORNTON NSW 2322

Filter Model Number : Rion NA-28
Filter Serial Number : N/A
Instrument Serial Number : 00370304
Microphone Serial Number : 10421
Pre-amplifier Serial Number : 60313

Atmospheric Conditions

Ambient Temperature : 22.3°C
Relative Humidity : 43%
Barometric Pressure : 99.96kPa

Calibration Technician : Vicky Jaiswal
Calibration Date : 17/11/2016

Secondary Check: Sandra Minto
Report Issue Date : 17/11/2016

Approved Signatory :

Juan Agüero

Clause and Characteristic Tested	Result	Clause and Characteristic Tested	Result
4.4 & 5.3: 1/1 Octave relative attenuation	Pass	4.6 & 5.5: Linear operating range	Pass
4.4 & 5.3: 1/3 Octave relative attenuation	Pass	4.8 & 5.7: Anti-alias filters	Pass
		4.10 & 5.9: Flat frequency response	Pass

The fractional octave band meter under test has been shown to conform to the class 1 requirements for periodic testing as described in AS 4476:1997 for the tests stated above.

Least Uncertainties of Measurement -

Electrical Tests

< 16Hz	±0.19dB
16Hz-100Hz	±0.11dB
100Hz-1000Hz	±0.09dB
1000Hz-10kHz	±0.09dB
> 10kHz	±0.16dB

Environmental Conditions

Temperature	±0.05°C
Relative Humidity	±0.46%
Barometric Pressure	±0.017kPa

All uncertainties are derived at the 95% confidence level with a coverage factor of 2.

This calibration certificate is to be read in conjunction with the calibration test report.



Acoustic Research Labs Pty Ltd is NATA Accredited Laboratory Number 14172.
Accredited for compliance with ISO/IEC 17025.

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration and inspection reports.

PAGE 1 OF 1



**Acoustic
Research
Labs Pty Ltd**

Level 7 Building 2 423 Pennant Hills Rd
Pennant Hills NSW AUSTRALIA 2120
Ph: +61 2 9484 0800 A.B.N. 65 160 399 119
www.acousticresearch.com.au

Sound Calibrator
IEC 60942-2004

Calibration Certificate

Calibration Number C16526

Client Details Global Acoustics Pty Ltd
12/16 Huntingdale Drive
Thornton NSW 2322

Equipment Tested/ Model Number : LarsonDavis Cal150
Instrument Serial Number : 3333

Atmospheric Conditions

Ambient Temperature : 21.8°C
Relative Humidity : 38.1%
Barometric Pressure : 97.74kPa

Calibration Technician : Vicky Jaiswal
Calibration Date : 30/09/2016

Secondary Check: Riley Cooper
Report Issue Date : 04/10/2016

Approved Signatory :

Ken Williams

Clause and Characteristic Tested	Result	Clause and Characteristic Tested	Result
5.2.2: Generated Sound Pressure Level	Pass	5.3.2: Frequency Generated	Pass
5.2.3: Short Term Fluctuation	Pass	5.5: Total Distortion	Pass

	Nominal Level	Nominal Frequency	Measured Level	Measured Frequency
Measured Output	94.0	1000.0	94.1	1000.04
Measured Output	114.0	1000.0	113.9	1000.05

The sound calibrator has been shown to conform to the class 2 requirements for periodic testing, described in Annex B of IEC 60942:2004 for the sound pressure level(s) and frequency(ies) stated, for the environmental conditions under which the tests were performed.

Least Uncertainties of Measurement -

Specific Tests		Environmental Conditions	
Generated SPL	±0.09dB	Temperature	±0.05°C
Short Term Fluct.	±0.02dB	Relative Humidity	±0.46%
Frequency	±0.01%	Barometric Pressure	±0.017kPa
Distortion	±0.5%		

All uncertainties are derived at the 95% confidence level with a coverage factor of 2.



This calibration certificate is to be read in conjunction with the calibration test report.

Acoustic Research Labs Pty Ltd is NATA Accredited Laboratory Number 14172.
Accredited for compliance with ISO/IEC 17025.

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/National standards.

PAGE 1 OF 1