

RIX'S CREEK MINE

Monthly Compliance Noise Monitoring November 2020

Prepared for:

Bloomfield Collieries
Four Mile Creek Road
Ashtonfield NSW 2323

PREPARED BY

SLR Consulting Australia Pty Ltd
ABN 29 001 584 612
10 Kings Road
New Lambton NSW 2305 Australia
(PO Box 447 New Lambton NSW 2305)
T: +61 2 4037 3200
E: newcastleau@slrconsulting.com www.slrconsulting.com

BASIS OF REPORT

This report has been prepared by SLR Consulting Australia Pty Ltd (SLR) with all reasonable skill, care and diligence, and taking account of the timescale and resources allocated to it by agreement with Bloomfield Collieries (the Client). Information reported herein is based on the interpretation of data collected, which has been accepted in good faith as being accurate and valid.

This report is for the exclusive use of the Client. No warranties or guarantees are expressed or should be inferred by any third parties. This report may not be relied upon by other parties without written consent from SLR.

SLR disclaims any responsibility to the Client and others in respect of any matters outside the agreed scope of the work.

DOCUMENT CONTROL

Reference	Date	Prepared	Checked	Authorised
630.12841-R17-v1.0	20 January 2021	Shannon Harvey	Martin Davenport	Martin Davenport

CONTENTS

1	INTRODUCTION	5
1.1	Background	5
1.2	Objectives of this Report	5
1.3	Acoustic Terminology	5
2	RIX'S CREEK NOISE CRITERIA	6
2.1	EPL Noise Limits – Rix's Creek Mine Operations.....	6
2.2	Rix's Creek North Project Approval	8
2.3	Rix's Creek South Development Consent	8
2.4	Noise Limits at the Nominated Noise Monitoring Locations.....	8
3	NOISE MONITORING METHODOLOGY	8
3.1	General Requirements.....	8
3.2	Modifying Factors	9
3.3	Rix's Creek Mine Noise Monitoring Locations	9
3.4	Noise Monitoring Location Selection.....	13
3.5	Nominated Monitoring Locations.....	13
4	OPERATOR ATTENDED NOISE MONITORING.....	14
4.1	Results of Operator Attended Noise Monitoring	14
4.1.1	Operator-attended Noise Survey Results – NM04 'Andrews'	15
4.1.1.1	Operator Attended Noise Survey Summary – NM04	15
4.1.2	Operator-attended Noise Survey Results – NM05 'Ferraro'	16
4.1.2.1	Operator Attended Noise Survey Summary – NM05	16
4.1.3	Operator-attended Noise Survey Results – NM06 'Bridgman Road'	17
4.1.3.1	Operator Attended Noise Survey Summary – NM06	17
4.1.4	Operator-attended Noise Survey Results – NM07 'Gardiner Circuit'	18
4.1.4.1	Operator Attended Noise Survey Summary – NM07	18
4.1.5	Operator-attended Noise Survey Results – NM08 'Belmadar Way'	19
4.1.5.1	Operator Attended Noise Survey Summary – NM08	19
4.1.6	Operator-attended Noise Survey Results – NM11 '320 Maison Dieu Road'	19
4.1.6.1	Operator Attended Noise Survey Summary – NM11	20
4.2	Compliance Assessment and Discussion of Results.....	21
4.2.1	Rix's Creek Mine Noise Compliance	21
4.2.2	Discussion of Results	22
5	CONCLUSION.....	22

CONTENTS

DOCUMENT REFERENCES

TABLES

Table 1	Compliance Criteria.....	8
Table 2	Noise Attended Monitoring Locations.....	9
Table 3	Attended Noise Monitoring Locations.....	13
Table 4	Location NM04.....	15
Table 5	Location NM05.....	16
Table 6	Location NM06.....	17
Table 7	Location NM07.....	18
Table 8	Location NM08.....	19
Table 9	Location NM11.....	20
Table 10	Rix's Creek North Compliance Noise Assessment – Operations.....	21
Table 11	Rix's Creek South Compliance Noise Assessment – Operations.....	22

FIGURES

Figure 1	Relevant EPL Noise Criteria.....	6
Figure 2	Noise Monitoring Locations North.....	10
Figure 3	Noise Monitoring Locations South.....	11
Figure 4	Attended Noise Compliance Monitoring Sites.....	12

APPENDICES

Appendix A	– Acoustic Terminology
Appendix B	– Rix's Creek North – PA 08_0102 – Schedule 3
Appendix C	– Rix's Creek North – DA 49/94 – Schedule 2

1 Introduction

1.1 Background

Bloomfield Collieries Pty Ltd (Bloomfield) has commissioned SLR Consulting Australia Pty Ltd (SLR) to conduct night-time compliance noise monitoring of Rix's Creek Mine (the Mine).

The Mine is an open cut coal mine located approximately 5km north-west of Singleton in the Hunter Valley Coalfields of NSW. The Mine comprises the original Rix's Creek Mine and the former Vale Integra Open Cut Mine. The Mine operates under EPL 3391 but as the two previously mentioned mines operate under separate development approvals it is necessary to refer to the two parts of the Mine separately. In this compliance report the original Rix's Creek Mine is referred to as Rix's Creek South (RCS) and the former Vale Integra Open Cut Mine is referred to as Rix's Creek North (RCN).

Compliance noise monitoring of the Mine is guided by the relevant requirements of;

- Environment Protection Licence 3391 dated 23rd April 2019 (EPL 3391)
- Rix's Creek Mine Noise Management Plan dated 24th July 2019 (NMP)
- Rix's Creek North Project Approval PA 08_0102 MOD 8 dated 3rd April 2019 (PA 08_0102)
- SSD 6300 Rix's Creek Continuation Project

This report presents the results and findings from the operator-attended noise survey conducted between Wednesday 18 November and Thursday 19 November 2020.

1.2 Objectives of this Report

The objectives of the noise monitoring survey for this month were:

- Conduct Attended Noise Compliance Monitoring in accordance with the Rix's Creek Mine NMP, the NSW Industrial Noise Policy (2000) and requirements as noted in the "Implementation and transitional arrangements for the Noise Policy for Industry (2017).
- Measure the ambient noise levels of at least six (6) noise sensitive locations surrounding the Mine during the night-period from 9:00 pm to 7:00 am for a minimum of (thirty) 30 minutes at each location.
- Quantify all sources of noise within each of the attended surveys, including estimated contribution or maximum level of the individual noise sources.
- Assess the noise emissions of the mine and determine compliance with respect to the relevant conditions.

1.3 Acoustic Terminology

The following report uses specialist acoustic terminology. An explanation of common terms is provided in **Appendix A**.

2 Rix's Creek Noise Criteria

RCS operations are subject to the conditions contained in SSD 6300 and EPL 3391. It should be noted that RCS are now operating under SSD 6300. For the purpose of monitoring and reporting, the criteria for RCS under the new consent have been adopted.

RCN operations are subject to the conditions contained in Schedule 3 of PA 08_0102 (**Appendix B**) and EPL3391. As the PA 08_0102 criteria are more stringent than EPL 3391, PA 08_0102 is applied as the most relevant project criteria for RCN.

The Rix's Creek Mine NMP encompasses the noise management and relevant criteria for RCS and RCN operations, coal handling, preparation and processing and rail loading across the entire site. The Rix's Creek Mine NMP consolidates all requirements and provides (Section 5) procedures to ensure monthly attended noise compliance monitoring is carried out effectively.

2.1 EPL Noise Limits – Rix's Creek Mine Operations

The figures presented in **Figure 1** are extracts from the EPL 3391.

Figure 1 Relevant EPL Noise Criteria

L3 Noise limits

L3.1 Noise generated at the premises must not exceed the noise limits in the Table below.

Location	Day/Evening/Night LAeq (15 minute)	Night LA1 (1 minute)
EPA 29 and NMG1	40	48
EPA 30 and NMG3	40	45
EPA 31 and NMG4	37	49
EPA 32 and NMG5	41	47
EPA 33 and NMG6	42	47
EPA 34 and NMG7	40	45
EPA 35 and NMG8	40	47
EPA 36 and NMG10	40	47
EPA 37 and NMG11	40	47
EPA 38 and NMG12	40	47

L3.2 For the purpose of condition L3.1:

- a) EPA (number) refers to EPA identification point numbers as referenced in condition P1.4; and
- b) NMG (number) refers to all residential receivers on land within noise monitoring groups identified by

Figure 1.

L3.3 For the purpose of condition L3.1:

- a) Day is defined as the period from 7am to 6pm Monday to Saturday and 8am to 6pm Sundays and Public Holidays;
- b) Evening is defined as the period from 6pm to 10pm; and
- c) Night is defined as the period from 10pm to 7am Monday to Saturday and 10pm to 8am Sundays and Public Holidays.

L3.4 The noise limits set out in condition L3.1 apply under all meteorological conditions except for the following:

- a) Wind speeds greater than 3 metres/second at 10 metres above the ground level;
- b) Stability category F temperature inversion conditions and wind speeds greater than 2 metres/second at 10 metres above ground level; or
- c) Stability category G temperature inversion conditions.

L3.5 For the purposes of condition L3.4:

- a) Data recorded by a meteorological station installed on the premises at EPA Identification Point 11 must be used to determine meteorological conditions; and
- b) Temperature inversion conditions (stability category) are to be determined by the sigma-theta method referred to in Part E4 of Appendix E to the NSW Industrial Noise Policy.

L3.6 A non-compliance of condition L3.1 will still occur where noise generated from the premises in excess of the appropriate limit is measured:

- at any location within the Noise Monitoring Groups defined in Condition L3.1.

L3.7 For the purposes of determining the noise generated at the premises the modification factors in Section 4 of the NSW Industrial Noise Policy must be applied, as appropriate, to the noise levels measured by the noise monitoring equipment.

Definitions:

- *NSW Industrial Noise Policy refers to the document titled "New South Wales Industrial Noise Policy published by the EPA in January 2000.*
- *Noise refers to 'sound pressure levels' for the purpose of conditions L3.1 to L3.8.*

M9 Noise monitoring

M9.1 To assess compliance with condition L3.1, attended noise monitoring must be undertaken in accordance with conditions L3.6 and:

- a) at a minimum of 6 locations from those listed condition P1.4 shown to be experiencing noise enhancing meteorological conditions;
- b) occur every calendar month in a reporting period; and
- c) occur during one night-time period as defined in the NSW Industrial Noise Policy for a minimum of 30 minutes at each location from a) during the night.

M9.2 Where required in writing by the EPA, the licensee must carry out monitoring to determine if the modification factors in Section 4 of the NSW Industrial Noise Policy need to be applied.

2.2 Rix's Creek North Project Approval

The noise limits specified for RCN can be found within the reproduced figures of relevant conditions from the Project Approval PA 08_0102 (MOD 8) in **Appendix B**.

2.3 Rix's Creek South Development Consent

The noise limits specified for RCS can be found within the reproduced extracts from the Development Consent SSD 6300 in **Appendix C**.

2.4 Noise Limits at the Nominated Noise Monitoring Locations

The relevant conditions for RCS and RCN are presented in **Table 1**.

Table 1 Compliance Criteria

NMP ID	EA Ref. (RCN/RCS) ¹	Rix's Creek North		Rix's Creek South	
		LAeq(15minute) dB	LA1(1minute) dB	LAeq(15minute) dB	LA1(1minute) dB
NM01	132/171	38	48	40	47
NM03	63/NA	40	45	35	45
NM04	19/12	37	49	42	47
NM05	11/8	41	47	42	47
NM06	150/23	36	48	42	47
NM07	NA/61	NA	NA	40	47
NM08	NA/152	NA	NA	40	47
NM10	NA/126	NA	NA	40	47
NM11	NA/160	NA	NA	40	47
NM12	NA/168	NA	NA	40	47

Notes:

1. Criterion set as for Rix's Creek North in the absence of data in the EIS; and
2. "NA" indicates criteria not applicable at that location, as it was not included in the relevant EA, EIS or Project Approval

3 Noise Monitoring Methodology

3.1 General Requirements

The night-time Attended Noise Compliance Monitoring was conducted in accordance with Rix's Creek Mine NMP, the NSW Industrial Noise Policy (2000) and requirements as noted in the "Implementation and transitional arrangements for the Noise Policy for Industry (2017).

3.2 Modifying Factors

The implementation and transitional arrangements for the NSW Noise Policy for Industry (NPfI) notes the following:

The NSW Industrial Noise Policy (2000) will continue to apply where it is referenced in existing statutory instruments (such as consents and licences), except for the NSW Industrial Noise Policy Section 4 modifying factors, which will be transitioned to the Noise Policy for Industry (2017) Fact Sheet C through a NSW Industrial Noise Policy application note. This approach has been taken because the Noise Policy for Industry (2017) modification factor approach reflects more recent understanding of the impact of tonal and low-frequency noise on the community.

As such appropriate modifying factors such as low frequency noise have been assessed against NPfI requirements.

Relevant modifying factors are assessed by analysis of the measured RCM L_{Aeq} spectrum where applicable.

3.3 Rix's Creek Mine Noise Monitoring Locations

Residences surrounding the Mine have been grouped generally according to the locality and local acoustic environment. These groupings are referenced in the relevant EAs as Noise Assessment Groups (NAG). Monitoring locations, including the receptor reference numbers from the relevant EAs and the NAG each represents are listed below.


Table 2 Noise Attended Monitoring Locations

NMP ID	EA Ref. (ICO/RCM) ¹	Owner or Area	NAG ²
NM01	132/171	Bowman	6 (RCN)/M (RCS)
NM03	63/NA	Cherry	B, C, F, 1, 6 and 12 (RCN)
NM04	19/12	Andrews	11 and A (RCN)/A (RCS)
NM05	11/8	Ferraro	10 and 11 (RCN)/A (RCS)
NM06	150/23	Bridgman Road	9 (RCN)/B and C (RCS)
NM07	NA/61	Gardiner Circuit	8 (RCN)/D and E (RCS)
NM08	NA/152	Belmadar Way	NA/J, G and F (RCS)
NM10	NA/126	Long Point	NA/K and I (RCS)
NM11	NA/160	320 Maison Dieu Road	NA/K (RCS)
NM12	NA/168	Corner of Maison Dieu Road and Shearers Lane	NA/L (RCS)

Notes: 1. NA indicates location was not included in the EA for that project; and
2. Indicates the NAG reference the location represents from the relevant EAs


A site map sourced from the NMP and EPL 3391 identifying the assessment and noise monitoring locations are presented in **Figure 2**, **Figure 3** and **Figure 4**.

Figure 2 Noise Monitoring Locations North

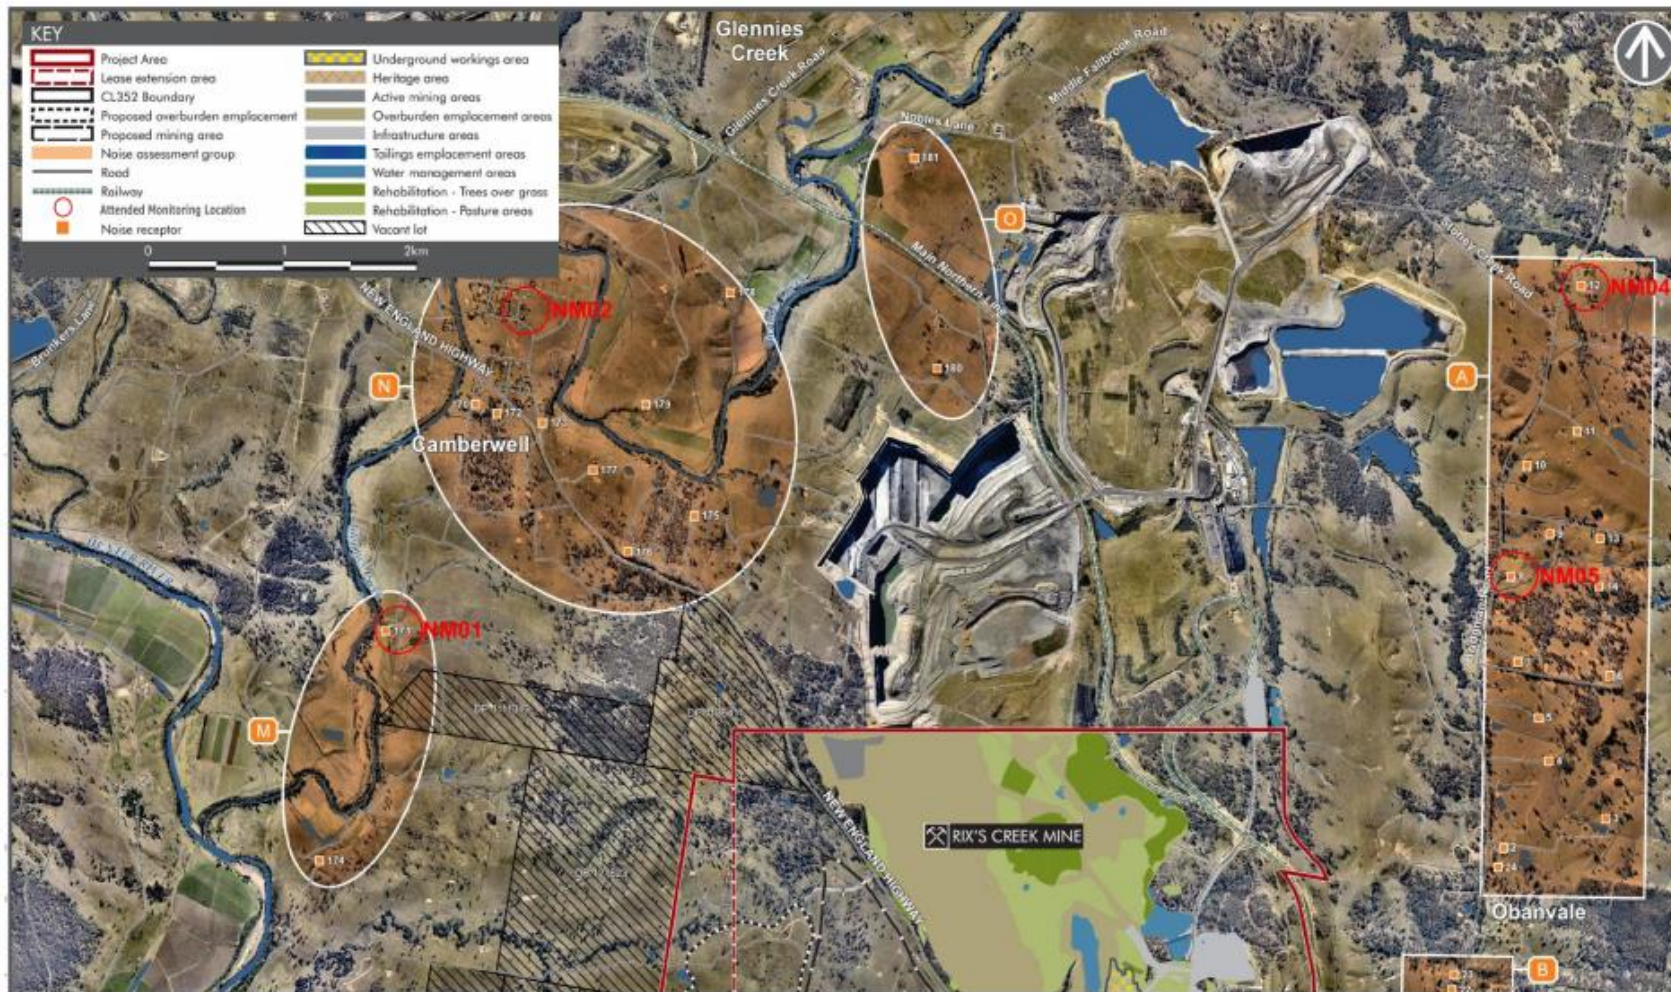


Source: Noise Monitoring Plan – Rix's Creek Mine

Figure 3 Noise Monitoring Locations South

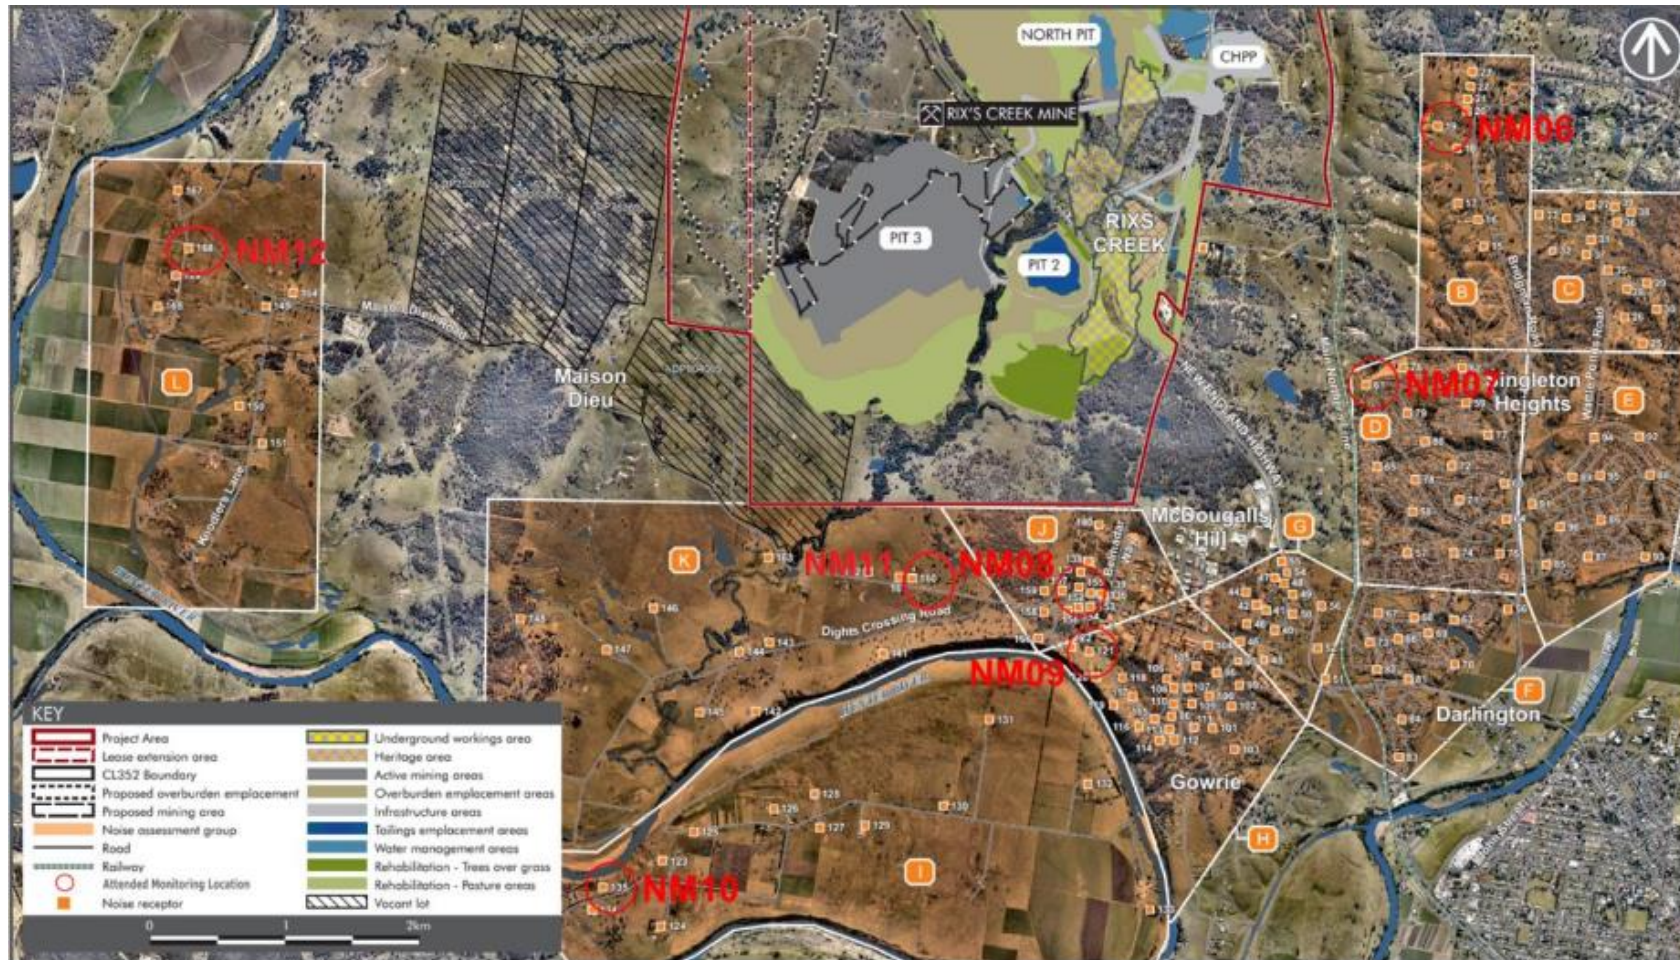

Source: Noise Monitoring Plan – Rix's Creek Mine

Figure 4 Attended Noise Compliance Monitoring Sites

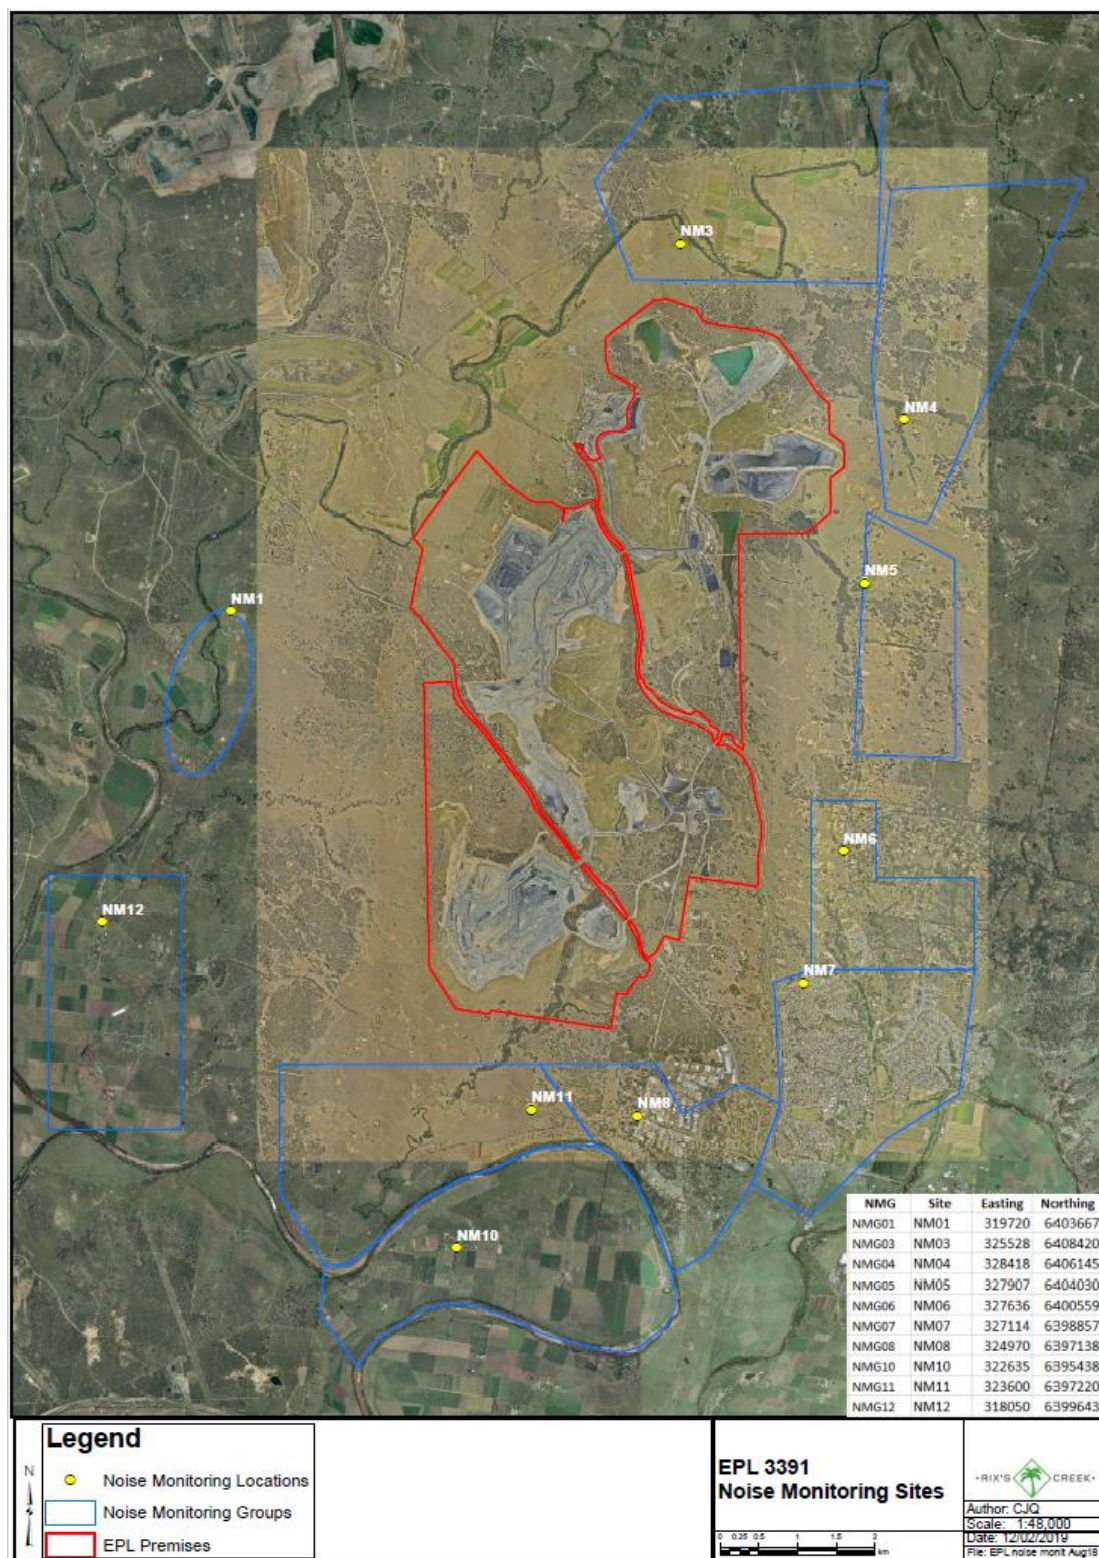

Source: Rix's Creek Mine EPL 3391 - Figure 1

3.4 Noise Monitoring Location Selection

As per the NMP, the procedure stated below was used to select appropriate noise monitoring locations:

Compliance monitoring is to be conducted at locations indicated as being in the zone of meteorological enhancement by the predictive noise model. The procedure for determining which locations to monitor is as follows:

1. *The acoustic consultant undertaking the monitoring will access the predictive model website for the site for the upcoming night shift. The model results will indicate graphically the predicted zone of the meteorological enhancement;*
2. *A monitoring plan will be developed by the consultant for the upcoming night period. Locations are to include:*
 - a. *If a clear zone of meteorological enhancement is indicated, one location in the opposite direction to the zone of predicted enhancement, and, all locations located within the predicted zone of enhancement; and*
 - b. *If relatively neutral conditions are predicted with no clear zone of meteorological enhancement, the eight locations nearest the mine will be monitored. NM01, NM03 and NM10 would be excluded, as non-compliance at those locations in the absence of meteorological enhancement is unlikely due to distance from the Mine.*
3. *A minimum of six locations are to be monitored per night.*

3.5 Nominated Monitoring Locations

Night-time attended noise compliance monitoring during November 2020 was conducted at six (6) locations. The details of the monitoring locations are given in **Table 3**.

Table 3 Attended Noise Monitoring Locations

Noise Monitoring Locations	EA Ref. (RCN/RCS)	Owner or Area
NM04	19/12	Andrews
NM05	11/8	Ferraro
NM06	150/23	Bridgman Road
NM07	NA/61	Gardiner Circuit
NM08	NA/152	Belmadar Way
NM11	NA/160	320 Maison Dieu Road

4 Operator Attended Noise Monitoring

Operator attended noise surveys were conducted at each of the six (6) nominated noise monitoring locations during the night-time period from 9:00 PM to identify and quantify sources of noise that contributed to the overall ambient noise level. Two (2) 15 minute measurements were conducted at each site using an integrating sound level meter to observe condition M9.1 of EPL 3391 which requires a minimum of 30 minutes at each location.

4.1 Results of Operator Attended Noise Monitoring

Operator attended noise compliance monitoring commenced at 21:02 on Wednesday 18 November 2020 and the final noise survey commenced at 00:27 Thursday 19 November 2020. Operator attended noise surveys were conducted using a Brüel & Kjær Type 2250L (S/N 3003389).

Weather data during the monitoring period has been obtained from the weather station located on the Rix's Mine Creek Mine Weather Station site (EPL 3391 ID #11).

Ambient noise levels given in the tables include all noise sources such as traffic, insects, birds, and mine operations as well as any other industrial operations.

The tables provide the following information:

- Monitoring location.
- Date and start time.
- Wind velocity (m/s) and Temperature (°C) at the measurement location.
- Typical maximum (L_{Amax}) and contributed noise levels.

Mine contributions listed in the tables are from Rix's Creek Mine and are stated only when a contribution could be quantified.

4.1.1 Operator-attended Noise Survey Results – NM04 'Andrews'

Results of the operator-attended noise surveys at NM04 are provided in **Table 4**. Monitoring location NM04 represents residential receptors located to the north of the mine.

Table 4 Location NM04

Period	Date/ Start time/ Weather	Primary Noise Descriptor (dBA re 20 µPa)					Modifying factors applicable	Description of Noise Emission, Typical Maximum Noise Levels (LAmax – dBA)
		LAmix	LA1	LA10	LA90	LAeq		
1	19/11/2020 00:12 16°C 4.75 m/s SE	76	58	41	32	48	N/A	Road traffic 38-76 Insects/frogs 34-39 Rix's Creek North Inaudible
		Estimated Rix's Creek Mine North Noise Contribution			Estimated Rix's Creek Mine South Noise Contribution			
	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)				
	WS>3.0 m/s? Yes	Criteria Limit: 37	Criteria Limit: 49	Criteria Limit: 37	Criteria Limit: 49			
		Inaudible	Inaudible	Inaudible	Inaudible			
2	19/11/2020 00:27 16°C 4.25 m/s SE	54	50	43	32	40	N/A	Road traffic 37-54 Insects/frogs 34-39 Bats 38-50 Rix's Creek North Digger clunks barely audible <25
		Estimated Rix's Creek Mine North Noise Contribution			Estimated Rix's Creek Mine South Noise Contribution			
	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)				
	WS>3.0 m/s? Yes	Criteria Limit: 37	Criteria Limit: 49	Criteria Limit: 37	Criteria Limit: 49			
		<25	<25	Inaudible	Inaudible			

Note 1: N/A = Not Applicable due to non-compliant weather conditions and/or SMC being inaudible or significantly below the noise criteria.

4.1.1.1 Operator Attended Noise Survey Summary – NM04

RCS operations were inaudible during both periods of the night-time noise monitoring surveys at this location. RCN operations were inaudible during the first period and barely audible during the second period. RCN LA_{eq}(15 minute) and LA₁(1minute) was estimated to be <25 dBA and <25 dBA during the second survey.

Road traffic noise and noise from insects and frogs contributed to the overall ambient noise environment during the night-time operator attended noise survey at this location.

4.1.2 Operator-attended Noise Survey Results – NM05 'Ferraro'

Results of the operator-attended noise surveys at NM05 are provided in **Table 5**. Monitoring location NM05 represents residential receptors located to the east of the site.

Table 5 Location NM05

Period	Date/ Start time/ Weather	Primary Noise Descriptor (dBA re 20 µPa)					Modifying factors applicable	Description of Noise Emission, Typical Maximum Noise Levels (L _{Amax} – dBA)
		L _{Amax}	L _{A1}	L _{A10}	L _{A90}	L _{Aeq}		
1	18/11/2020 23:35 16°C 5.5 m/s SE	88	72	49	37	60	N/A	Road traffic 55-88 Insects/frogs 36-41 Horse 42-52 Rix's Creek North Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	L _{Aeq} (15minute)	L _{A1} (1minute)	L _{Aeq} (15minute)	L _{A1} (1minute)			
		Criteria Limit: 41	Criteria Limit: 47	Criteria Limit: 41	Criteria Limit: 47			
		Inaudible	Inaudible	Inaudible	Inaudible			
2	18/11/2020 23:50 16°C 5.5 m/s SE	86	79	58	38	64	N/A	Road traffic 50-86 Insects/frogs 39-41 Horse 44-55 Rix's Creek North Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	L _{Aeq} (15minute)	L _{A1} (1minute)	L _{Aeq} (15minute)	L _{A1} (1minute)			
		Criteria Limit: 41	Criteria Limit: 47	Criteria Limit: 41	Criteria Limit: 47			
		Inaudible	Inaudible	Inaudible	Inaudible			

Note 1: N/A = Not Applicable due to non-compliant weather conditions and/or SMC being inaudible or significantly below the noise criteria.

4.1.2.1 Operator Attended Noise Survey Summary – NM05

Rix's Creek Mine operations were inaudible during both periods of the night-time noise monitoring surveys at this location.

Road traffic noise and noise from insects and animals contributed to the overall ambient noise environment during the night-time operator attended noise survey at this location.

4.1.3 Operator-attended Noise Survey Results – NM06 ‘Bridgman Road’

Results of the operator-attended noise surveys at NM06 are provided in **Table 6**. Monitoring location NM06 represents residential receptors located to the south-east of the site.

Table 6 Location NM06

Period	Date/ Start time/ Weather	Primary Noise Descriptor (dBA re 20 µPa)					Modifying factors applicable	Description of Noise Emission, Typical Maximum Noise Levels (LAmax – dBA)
		LAmax	LA1	LA10	LA90	LAeq		
1	18/11/2020 22:57 16°C 5.25 m/s SE	78	65	49	41	54	N/A	Vehicle passby 50-78 Insects/frogs 41-51 Dog barking 48-55 Bats 50-53 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: 36	Criteria Limit: 48	Criteria Limit: 42	Criteria Limit: 47			
2	18/11/2020 23:12 16°C 5 m/s SE	Inaudible	Inaudible	Inaudible	Inaudible		N/A	Road traffic 48-76 Insects/frogs 41-51 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: 36	Criteria Limit: 48	Criteria Limit: 42	Criteria Limit: 47			
1	18/11/2020 22:57 16°C 5.25 m/s SE	78	65	49	41	54	N/A	Vehicle passby 50-78 Insects/frogs 41-51 Dog barking 48-55 Bats 50-53 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: 36	Criteria Limit: 48	Criteria Limit: 42	Criteria Limit: 47			
2	18/11/2020 23:12 16°C 5 m/s SE	Inaudible	Inaudible	Inaudible	Inaudible		N/A	Road traffic 48-76 Insects/frogs 41-51 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: 36	Criteria Limit: 48	Criteria Limit: 42	Criteria Limit: 47			

Note 1: N/A = Not Applicable due to non-compliant weather conditions and/or SMC being inaudible or significantly below the noise criteria.

4.1.3.1 Operator Attended Noise Survey Summary – NM06

Rix's Creek Mine operations were inaudible during both periods of the night-time noise monitoring surveys at this location.

Road traffic noise and noise from insects and animals contributed to the overall ambient noise environment during the night-time operator attended noise survey at this location.

4.1.4 Operator-attended Noise Survey Results – NM07 ‘Gardiner Circuit’

Results of the operator-attended noise surveys at NM07 are provided in **Table 7**. Monitoring location NM07 represents residential receptors located to the south-east of the site.

Table 7 Location NM07

Period	Date/ Start time/ Weather	Primary Noise Descriptor (dBA re 20 µPa)					Modifying factors applicable	Description of Noise Emission, Typical Maximum Noise Levels (LAmax – dBA)
		LAmax	LA1	LA10	LA90	LAeq		
1	18/11/2020 22:19 17°C 5.75 m/s SE	61	57	43	36	44	N/A	Road traffic 34-40 Vehicle passby 47-61 Insects 37-45 Exhaust clicks 40-43 Rix's Creek North Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 45			
2	18/11/2020 22:34 16°C 5.25 m/s SE	Inaudible	Inaudible	Inaudible	Inaudible		N/A	Road traffic 34-39 Vehicle passby 40-59 Insects 37-45 Dog bark 38-48 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 45			
		Inaudible	Inaudible	Inaudible	Inaudible			
		LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 45			
		Inaudible	Inaudible	Inaudible	Inaudible			
		LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 45			

Note 1: N/A = Not Applicable due to non-compliant weather conditions and/or SMC being inaudible or significantly below the noise criteria.

4.1.4.1 Operator Attended Noise Survey Summary – NM07

RCS operations were inaudible during both periods of the night-time noise monitoring surveys at this location.

Road traffic noise as well as noise from insects and dogs contributed to the overall ambient noise environment during the night-time operator attended noise survey at this location.

4.1.5 Operator-attended Noise Survey Results – NM08 ‘Belmadar Way’

Results of the operator-attended noise surveys at NM08 are provided in Error! Reference source not found.. Monitoring location NM08 represents residential receptors located to the south-east of the site.

Table 8 Location NM08

Period	Date/ Start time/ Weather	Primary Noise Descriptor (dBA re 20 µPa)					Modifying factors applicable	Description of Noise Emission, Typical Maximum Noise Levels (LAmax – dBA)
		LAmax	LA1	LA10	LA90	LAeq		
1	18/11/2020 21:38 17°C 6.5 m/s ESE	68	53	44	40	45	N/A	Road traffic 37-46 Vehicle passby 50-68 Insects/frogs 38-42 Other industry 43-48 Bats 48-55 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 47			
2	18/22/2020 21:53 17°C 6.5 m/s ESE	72	64	45	39	49	N/A	Road traffic 40-50 Vehicle passby 50-72 Insects/frogs 38-42 Bats 50-54 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution		Estimated Rix's Creek Mine South Noise Contribution				
	WS>3.0 m/s? Yes	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 47			
		Inaudible	Inaudible	Inaudible	Inaudible			
		LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 47			
		Inaudible	Inaudible	Inaudible	Inaudible			
		LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 47			
		Inaudible	Inaudible	Inaudible	Inaudible			
		LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 47			

Note 1: N/A = Not Applicable due to non-compliant weather conditions and/or SMC being inaudible or significantly below the noise criteria.

4.1.5.1 Operator Attended Noise Survey Summary – NM08

RCS operations were inaudible during both periods of the night-time noise monitoring surveys at this location.

Road traffic noise, animal noise as well as noise from other industry contributed to the overall ambient noise environment during the night-time operator attended noise survey at this location.

4.1.6 Operator-attended Noise Survey Results – NM11 ‘320 Maison Dieu Road’

Results of the operator-attended noise surveys at NM11 are provided in Error! Reference source not found.. Monitoring location NM11 represents residential receptors located to the south of the site.

Table 9 Location NM11

Period	Date/ Start time/ Weather	Primary Noise Descriptor (dBA re 20 µPa)					Modifying factors applicable	Description of Noise Emission, Typical Maximum Noise Levels (L _{Amax} – dBA)
		L _{Amax}	L _{A1}	L _{A10}	L _{A90}	L _{Aeq}		
1	18/11/2020 21:02 18°C 6.5 m/s ESE	77	66	44	37	52	N/A	Road traffic 36-43 Vehicle passby 48-77 Insects/frogs 35-39 Wind gusts 40-50 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution			Estimated Rix's Creek Mine South Noise Contribution			
	WS>3.0 m/s? Yes	L _{Aeq} (15minute)	L _{A1} (1minute)	L _{Aeq} (15minute)	L _{A1} (1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 47			
		Inaudible	Inaudible	Inaudible	Inaudible			
2	18/11/2020 21:17 18°C 7 m/s ESE	48	41	40	37	38	N/A	Road traffic 36-41 Insects/frogs 36-48 Wind 38-41 Aeroplane 33-36 Rix's Creek South Inaudible
		Estimated Rix's Creek Mine North Noise Contribution			Estimated Rix's Creek Mine South Noise Contribution			
	WS>3.0 m/s? Yes	L _{Aeq} (15minute)	L _{A1} (1minute)	L _{Aeq} (15minute)	L _{A1} (1minute)			
		Criteria Limit: N/A	Criteria Limit: N/A	Criteria Limit: 40	Criteria Limit: 47			
		Inaudible	Inaudible	Inaudible	Inaudible			

Note 1: N/A = Not Applicable due to non-compliant weather conditions and/or SMC being inaudible or significantly below the noise criteria.

4.1.6.1 Operator Attended Noise Survey Summary – NM11

RCS operations remained inaudible during both night-time noise monitoring surveys at this location.

Road traffic noise, noise from insects and frogs as well as wind related noise contributed to the overall ambient noise environment during the night-time operator attended noise survey at this location.

4.2 Compliance Assessment and Discussion of Results

4.2.1 Rix's Creek Mine Noise Compliance

Results of the operational noise compliance assessment are given in **Table 10** and **Table 11**.

Table 10 Rix's Creek North Compliance Noise Assessment – Operations

Location	Period	Estimated RCN Contribution		Criteria		Compliance	
		LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)
NM04 Andrews	1	I/A ¹	I/A ¹	37	49	Y	Y
	2	<25	<25			Y	Y
NM05 Ferraro	1	I/A ¹	I/A ¹	41	47	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM06 Bridgman Road	1	I/A ¹	I/A ¹	36	48	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM07 Gardiners Circuit	1	I/A ¹	I/A ¹	N/A ³	N/A ³	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM08 Belmadar way	1	I/A ¹	I/A ¹	N/A ³	N/A ³	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM11 320 Maison Dieu Road	1	I/A ¹	I/A ¹	N/A ³	N/A ³	Y	Y
	2	I/A ¹	I/A ¹			Y	Y

Note 1. I/A – Inaudible

Note 2. N/M – Not measurable

Note 3. Location was not included in the EA for that project

Table 11 Rix's Creek South Compliance Noise Assessment – Operations

Location	Period	Estimated RCS Contribution		Criteria		Compliance	
		LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)	LAeq(15minute)	LA1(1minute)
NM04 Andrews	1	I/A ¹	I/A ¹	37	49	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM05 Ferraro	1	I/A ¹	I/A ¹	41	47	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM06 Bridgman Road	1	I/A ¹	I/A ¹	42	47	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM07 Gardiners Circuit	1	I/A ¹	I/A ¹	40	45	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM08 Belmadar way	1	I/A ¹	I/A ¹	40	47	Y	Y
	2	I/A ¹	I/A ¹			Y	Y
NM11 320 Maison Dieu Road	1	I/A ¹	I/A ¹	40	47	Y	Y
	2	I/A ¹	I/A ¹			Y	Y

Note 1. I/A – Inaudible

Note 2. N/M – Not measureable

Note 3. Location was not included in the EA for that project

4.2.2 Discussion of Results

Results presented in **Table 10** and **Table 11** indicates that noise levels from RCM complied with relevant criteria at all monitoring locations during the November 2020 monitoring survey.

5 Conclusion

SLR was engaged by Bloomfield Colliery Pty Limited to conduct monthly night time noise monitoring for the Rix's Creek Mine operations guided by the requirements of the Environment Protection License 3391, Rix's Creek Mine Noise Management Plan, Rix's Creek North Project Approval PA 08_0102 and Rix's Creek South Development Consent SSD 6300.

Operator-attended noise monitoring was conducted at six residential receiver locations between Wednesday 18 November 2020 and Thursday 19 November 2020 in order to determine the noise of the Rix's Creek Mine operations against the EPL 3391 and relevant Development Consent conditions.

Based on the measured Rix's Creek Mine noise contribution, compliance with the relevant noise limits were achieved at all noise monitoring locations for Rix's Creek North and Rix's Creek South under applicable weather conditions.

APPENDIX A

Acoustic Terminology

1. Sound Level or Noise Level

The terms 'sound' and 'noise' are almost interchangeable, except that 'noise' often refers to unwanted sound.

Sound (or noise) consists of minute fluctuations in atmospheric pressure. The human ear responds to changes in sound pressure over a very wide range with the loudest sound pressure to which the human ear can respond being ten million times greater than the softest. The decibel (abbreviated as dB) scale reduces this ratio to a more manageable size by the use of logarithms.

The symbols SPL, L or LP are commonly used to represent Sound Pressure Level. The symbol LA represents A-weighted Sound Pressure Level. The standard reference unit for Sound Pressure Levels expressed in decibels is 2×10^{-5} Pa.

2. 'A' Weighted Sound Pressure Level

The overall level of a sound is usually expressed in terms of dBA, which is measured using a sound level meter with an 'A-weighting' filter. This is an electronic filter having a frequency response corresponding approximately to that of human hearing.

People's hearing is most sensitive to sounds at mid frequencies (500 Hz to 4,000 Hz), and less sensitive at lower and higher frequencies. Different sources having the same dBA level generally sound about equally loud.

A change of 1 dB or 2 dB in the level of a sound is difficult for most people to detect, whilst a 3 dB to 5 dB change corresponds to a small but noticeable change in loudness. A 10 dB change corresponds to an approximate doubling or halving in loudness. The table below lists examples of typical noise levels.

Sound Pressure Level (dBA)	Typical Source	Subjective Evaluation
130	Threshold of pain	Intolerable
120	Heavy rock concert	Extremely noisy
110	Grinding on steel	
100	Loud car horn at 3 m	
90	Construction site with pneumatic hammering	Very noisy
80	Kerbside of busy street	
70	Loud radio or television	
60	Department store	Loud
50	General Office	
40	Inside private office	
30	Inside bedroom	Moderate to quiet
20	Recording studio	
		Quiet to very quiet
		Almost silent

Other weightings (eg B, C and D) are less commonly used than A-weighting. Sound Levels measured without any weighting are referred to as 'linear', and the units are expressed as dB(lin) or dB.

3. Sound Power Level


The Sound Power of a source is the rate at which it emits acoustic energy. As with Sound Pressure Levels, Sound Power Levels are expressed in decibel units (dB or dBA), but may be identified by the symbols SWL or LW, or by the reference unit 10^{-12} W.

The relationship between Sound Power and Sound Pressure is similar to the effect of an electric radiator, which is characterised by a power rating but has an effect on the surrounding environment that can be measured in terms of a different parameter, temperature.

4. Statistical Noise Levels

Sounds that vary in level over time, such as road traffic noise and most community noise, are commonly described in terms of the statistical exceedance levels LAN, where LAN is the A-weighted sound pressure level exceeded for N% of a given measurement period. For example, the LA1 is the noise level exceeded for 1% of the time, LA10 the noise exceeded for 10% of the time, and so on.

The following figure presents a hypothetical 15 minute noise survey, illustrating various common statistical indices of interest.

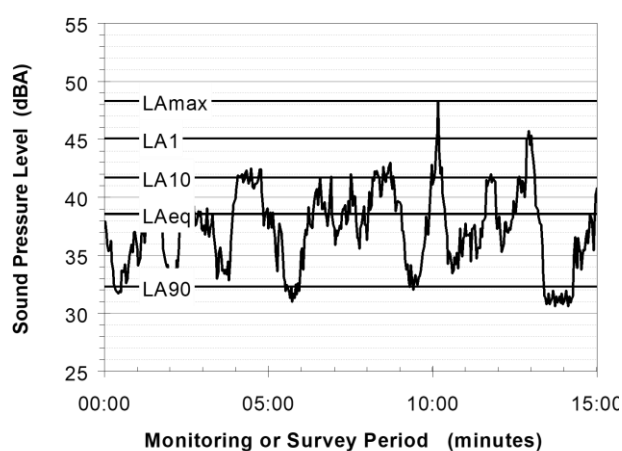

Of particular relevance, are:

LA1 The noise level exceeded for 1% of the 15 minute interval.

LA10 The noise level exceeded for 10% of the 15 minute interval. This is commonly referred to as the average maximum noise level.

LA90 The noise level exceeded for 90% of the sample period. This noise level is described as the average minimum background sound level (in the absence of the source under consideration), or simply the background level.

LAeq The A-weighted equivalent noise level (basically, the average noise level). It is defined as the steady sound level that contains the same amount of acoustical energy as the corresponding time-varying sound.

5. Frequency Analysis


Frequency analysis is the process used to examine the tones (or frequency components) which make up the overall noise or vibration signal.

The units for frequency are Hertz (Hz), which represent the number of cycles per second.

Frequency analysis can be in:

- Octave bands (where the centre frequency and width of each band is double the previous band)
- 1/3 octave bands (three bands in each octave band)
- Narrow band (where the spectrum is divided into 400 or more bands of equal width)

The following figure shows a 1/3 octave band frequency analysis where the noise is dominated by the 200 Hz band. Note that the indicated level of each individual band is less than the overall level, which is the logarithmic sum of the bands.

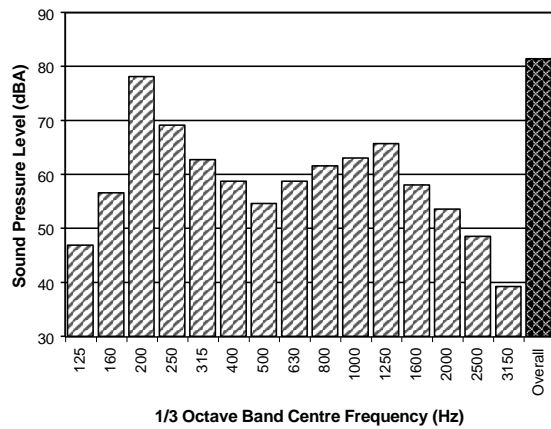

6. Annoying Noise (Special Audible Characteristics)

A louder noise will generally be more annoying to nearby receivers than a quieter one. However, noise is often also found to be more annoying and result in larger impacts where the following characteristics are apparent:

- **Tonality** - tonal noise contains one or more prominent tones (ie differences in distinct frequency components between adjoining octave or 1/3 octave bands), and is normally regarded as more annoying than 'broad band' noise.
- **Impulsiveness** - an impulsive noise is characterised by one or more short sharp peaks in the time domain, such as occurs during hammering.
- **Intermittency** - intermittent noise varies in level with the change in level being clearly audible. An example would include mechanical plant cycling on and off.
- **Low Frequency Noise** - low frequency noise contains significant energy in the lower frequency bands, which are typically taken to be in the 10 to 160 Hz region.

APPENDIX B

Rix's Creek North – PA 08_0102 – Schedule 3

Noise Criteria

Except for the land referred to in Table 1 for which the acquisition basis is noise, the Proponent must ensure that the noise generated by the project does not exceed the criteria in Table 2 at any residence on privately-owned land or on more than 25 percent of any privately-owned land.

Table 2: Noise criteria dB(A)

Location		Day	Evening	Night	
		L _{Aeq} (15min)	L _{Aeq} (15min)	L _{Aeq} (15min)	L _{A1} (1min)
NAG 1	All privately-owned land	38	38	36	46
NAG 2	All privately-owned land	39	39	37	47
NAG 3	All privately-owned land	40	40	39	49
NAG 4	99, 100	39	39	39	47
	88, 91, 95	40	40	40	47
	105, 161	41	41	41	47
	All other privately-owned land	42	42	37	47
NAG 5	104	35	35	35	52
	139	36	36	36	52
	103	37	37	37	52
	121	40	40	40	52
	118, 154	43	43	43	52
	Deleted	45	45	45	52
	Deleted	47	47	47	52
	All other privately-owned land	50	46	42	52
NAG 6	137	35	35	35	48
	133	37	37	37	48
	132	38	38	38	48
	All other privately-owned land	41	41	38	48
NAG 7	All privately-owned land	45	42	39	49
NAG 8	142	35	35	35	45
	All other privately-owned land	42	42	35	45
NAG 9	146, 148, 149	35	35	35	48
	143, 144, 145, 147, 150, 151, 152	36	36	36	48
	2	37	37	37	48
	3, 4	39	39	39	48
	All other privately-owned land	40	40	38	48
NAG 10	5	40	40	40	47
	6, 11	41	41	41	47
	8	42	42	42	47
	All other privately-owned land	39	39	37	47
NAG 11	18	35	35	35	49
	20, 21	37	37	36	49
	19	37	37	37	49
	17	38	38	38	49
	7	39	39	39	49
	12, 15	40	40	40	49
	14, 16	42	42	42	49
	All other privately-owned land	41	41	39	49

NAG 12	52, 55	35	35	35	45
	51, 56	37	37	37	45
	53, 57	38	38	38	45
	50, 54	39	39	39	45
	62	40	40	40	45
	All other privately-owned land	38	38	35	45
NAG A	24, 25, 26, 27, 28, 29, 30, 36, 37, 38, 39, 40, 41	35	35	35	46
	31	36	36	35	46
	42, 43	36	36	36	46
	32	37	37	35	46
	22, 23	37	37	37	46
	34	39	39	36	46
	35	39	39	35	46
	All other privately-owned land	39	39	36	46
NAG B	All privately-owned land	37	37	35	45
NAG C	47	39	39	39	45
	63	40	40	40	45
	All other privately-owned land	37	37	35	45
NAG D	44, 48	36	36	36	48
	49	39	39	39	48
	All other privately-owned land	40	40	38	48
NAG F	65, 66	39	39	39	50
	67	40	40	40	50
	68	42	42	42	50
	All other privately-owned land	40	40	40	50
NAG G	All privately-owned land	41	41	39	50
	All other privately-owned land	35	35	35	45

However, these criteria do not apply if the Proponent, or another mining company, has acquired the land or if the Proponent has a written agreement with the relevant landowner to exceed the criteria, and the Proponent has advised the Department in writing of the terms of this agreement.

Noise generated by the project is to be measured in accordance with the relevant requirements of the INP. Appendix 5 sets out the requirements for evaluating compliance with these criteria.

Note: To interpret the locations referred to in Table 2, see the applicable figures in Appendix 4.

Noise Acquisition Criteria

- If noise generated by the project exceeds the criteria in Table 3 at any residence on privately-owned land or on more than 25 percent of any privately-owned land, then upon receiving a written request for acquisition from the owner, the Proponent must acquire the land in accordance with the procedures in conditions 7 and 8 of Schedule 4.

Table 3: Noise acquisition criteria dB(A)

Location	Day	Evening	Night
	$L_{Aeq}(15min)$	$L_{Aeq}(15min)$	$L_{Aeq}(15min)$
All privately-owned land in NAG 1	44	44	42
All privately-owned land in NAG 2	45	45	43
All privately-owned land in NAG 3	46	46	45
All privately-owned land in NAG 4	48	48	43
All privately-owned land in NAG 5	56	52	48
All privately-owned land in NAG 6	47	47	44

All privately-owned land in NAG 6	47	47	44
All privately-owned land in NAG 7	51	48	45
All privately-owned land in NAG 8	48	48	41
All privately-owned land in NAG 9	46	46	44
All privately-owned land in NAG 10	45	45	43
All privately-owned land in NAG 11	47	47	45
All privately-owned land in NAG 12	44	44	41
All privately-owned land in NAG A	45	45	42
All privately-owned land in NAG B	43	43	41
All privately-owned land in NAG C	43	43	41
All privately-owned land in NAG D	46	46	44
All privately-owned land in NAG F	46	46	46
All privately-owned land in NAG G	47	47	45
All other privately-owned land	41	41	41

Noise generated by the project is to be measured in accordance with the relevant requirements of the INP. Appendix 5 sets out the requirements for evaluating compliance with these criteria.

Notes:

- To interpret the locations referred to in Table 3, see the applicable figures in Appendix 4; and
- For this condition to apply, the exceedances of the criteria must be systemic.

Cumulative Noise Criteria

- The Proponent must implement all reasonable and feasible measures to ensure that the noise generated by the project combined with the noise generated by other mines in the vicinity does not exceed the criteria in Table 4 at any residence on privately-owned land or on more than 25 percent of any privately-owned land (except for the residential receivers in Table 1 for which the acquisition basis is noise). The Proponent must share the costs associated with implementing these measures on as equitable basis as possible with the relevant mines.

Table 4: Cumulative noise criteria dB(A) L_{Aeq} (period)

Location	Day	Evening	Night
NAGs 4, 5, 8 and 9	55	45	40

All other privately-owned land	50	45	40
--------------------------------	----	----	----

Cumulative noise is to be measured in accordance with the relevant requirements of the INP. Appendix 5 sets out the requirements for evaluating compliance with these criteria.

For the purposes of this condition, 'reasonable and feasible avoidance and mitigation measures' includes, but is not limited to, the requirements in conditions 9 and 10 to develop and implement a real-time noise management system that ensures effective operational response to the risk of exceedance of the criteria.

Note: To identify the locations referred to in Table 4, see the figures in Appendix 4.

Cumulative Noise Acquisition Criteria

- If the noise generated by the project combined with the noise generated by other mines in the vicinity exceeds the criteria in Table 5 at any residence on privately-owned land or on more than 25 percent of privately-owned land (except for the residential receivers in Table 1 for which the acquisition basis is noise), then upon receiving a written request for acquisition from the landowner, the Proponent must acquire the land on as equitable basis as possible with the relevant mines in accordance with the procedures in conditions 7 and 8 of Schedule 4.

Table 5: Cumulative noise acquisition criteria dB(A) L_{Aeq} (period)

Location	Day	Evening	Night
NAGs 4, 5, 8 and 9	60	50	45
All other privately-owned land	55	50	45

Cumulative noise is to be measured in accordance with the relevant requirements of the INP. Appendix 5 sets out the requirements for evaluating compliance with these criteria.

Notes:

- To interpret the locations referred to in Table 5, see the applicable figures in Appendix 4; and
- For this condition to apply, the exceedances of the criteria must be systemic.

Additional Noise Mitigation Measures

6. Upon receiving a written request from the owner of any residence:
- on the land listed in Table 1 for which the acquisition basis is noise; or
 - on land listed in Table 6; or
 - on privately-owned land where subsequent noise monitoring shows the noise generated by the project is greater than or equal to the criteria in Table 7,
- the Proponent must implement additional noise mitigation measures (such as double-glazing, insulation, and/or air conditioning) at the residence in consultation with the landowner.

If within 3 months of receiving this request from the owner, the Proponent and the owner cannot agree on the measures to be implemented, or there is a dispute about the implementation of these measures, then either party may refer the matter to the Secretary for resolution.

Table 6: Land where additional noise mitigation measures are available on request

5 – D P Cox	6 – W G Cox
8 – DK Geelan	16 – A Lambkin
14 – M Hoggan	31 – C Craven
20 – Mr Garvie	48 – G Cheetham
32 – M Langdon	50 – D & M Bridge
47 – B & R Cherry	54 – G Holmes
53 – K & J Badior	63 – J & M Moore
62 – D Moran	95 – J & T Clarke
91 – T & D Olofsson	161 – V Lopes
105 – J & G McInerney	363 – D & L Bynon

Note: To interpret the locations referred to in Table 6, see the applicable figures in Appendix 4.

Table 7: Additional noise mitigation criteria dB(A)

Location	Day	Evening	Night
	L _{Aeq} (15min)	L _{Aeq} (15min)	L _{Aeq} (15min)
All privately-owned land in NAG 1	41	41	39
All privately-owned land in NAG 2	42	42	40
All privately-owned land in NAG 3	43	43	42
All privately-owned land in NAG 4	45	45	40
All privately-owned land in NAG 5	53	49	45
All privately-owned land in NAG 6	44	44	41
All privately-owned land in NAG 7	48	45	42
All privately-owned land in NAG 8	45	45	38
All privately-owned land in NAG 9	43	43	41
All privately-owned land in NAG 10	42	42	40
All privately-owned land in NAG 11	44	44	42
All privately-owned land in NAG 12	41	41	38
All privately-owned land in NAG A	42	42	39
All privately-owned land in NAG B	40	40	38
All privately-owned land in NAG C	40	40	38
All privately-owned land in NAG D	43	43	41
All privately-owned land in NAG F	43	43	43
All privately-owned land in NAG G	44	44	42
All other privately-owned land	38	38	38

Cumulative noise is to be measured in accordance with the relevant requirements of the INP. Appendix 5 sets out the requirements for evaluating compliance with these criteria.

Notes:

- To interpret the locations referred to in Table 7, see the applicable figures in Appendix 4; and
- For this condition to apply, the exceedances of the criteria must be systemic.

7. If the cumulative noise generated by the project combined with the noise generated by other mines in the vicinity exceeds the criteria at any residence on the land referred to in Table 8, then upon receiving a written request from the owner, the Proponent must implement additional noise mitigation measures (such as double-glazing, insulation, and/or air conditioning) at the residence in consultation with the landowner. The Proponent must share the costs associated with implementing these measures on an equitable basis as possible with the relevant mines.

If within 3 months of receiving this request from the owner, the Proponent and the owner cannot agree on the measures to be implemented, or there is a dispute about the implementation of these measures, then either party may refer the matter to the Secretary for resolution.

Table 8: Cumulative noise mitigation criteria dB(A) L_{Aeq} (period)

Location	Day	Evening	Night
NAGs 4, 5, 8 and 9	57	47	42
All other privately owned land	52	47	42

Cumulative noise is to be measured in accordance with the relevant requirements of the INP. Appendix 5 sets out the requirements for evaluating compliance with these criteria.

Notes:

- To interpret the locations referred to in Table 8, see the applicable figures in Appendix 4; and
- For this condition to apply, the exceedances of the criteria must be systemic.

Rail Noise

8. The Proponent must seek to ensure that its rail spur is only accessed by locomotives that are approved to operate on the NSW rail network in accordance with noise limits L6.1 to L6.4 in RailCorp's EPL (No. 12208) and ARTC's EPL (No. 3142) or a Pollution Control Approval issued under the former *Pollution Control Act 1970*.

Operating Conditions

9. The Proponent must:
- implement best practice noise management, including all reasonable and feasible noise mitigation measures, to minimise the operational, low frequency, and rail noise generated by the project at all times, including during temperature inversions;
 - operate a comprehensive noise management system that uses a combination of predicted meteorological forecasting and real-time noise monitoring data to guide the day-to-day planning of mining operations and the implementation of both proactive and reactive mitigation measures to ensure compliance with the relevant conditions of this approval;
 - maintain or improve the effectiveness of noise suppression equipment on plant at all times and ensure defective plant is not used operationally until fully repaired;
 - ensure that noise attenuated plant is deployed preferentially in locations relevant to sensitive receivers;
 - minimise the noise impacts of the project during meteorological conditions under which data is to be excluded for the purposes of assessing compliance with these conditions (see Appendix 5); and
 - co-ordinate the noise management on site with noise management at nearby mines (including Integra Underground, Ashton, [Rix's Creek South](#) and the Mount Owen Complex) to minimise cumulative noise impacts, to the satisfaction of the Secretary.

Noise Management Plan

10. The Proponent must prepare a Noise Management Plan for the project to the satisfaction of the Secretary. This plan must:
- be prepared in consultation with the EPA, and then submitted to the Secretary for approval;
 - describe the measures that would be implemented to ensure:
 - compliance with the noise criteria and operating conditions of this approval; and
 - best management practice is being employed;
 - describe the noise management system in detail;
 - include a noise monitoring program that:
 - uses a combination of real-time and supplementary attended monitoring measures to evaluate the performance of the project;
 - includes a protocol for determining exceedances of the relevant conditions in this approval;
 - evaluates and reports on the effectiveness of the noise management system and the best practice noise management measures; and
 - includes a protocol that has been prepared in consultation with the owners of nearby mines (including Integra Underground, Ashton, [Rix's Creek South](#) and the Mount Owen Complex) to minimise the cumulative noise impacts of the mines.

The Proponent must implement the [management plan as approved](#) by the Secretary.

APPENDIX C

Rix's Creek South – **SSD 6300** – Schedule 2 Part B

PART B SPECIFIC ENVIRONMENTAL CONDITIONS

NOISE

Operational Noise Criteria

- B1. The Applicant must ensure that the noise generated by the development does not exceed the criteria in Table 1 at any residence^a on privately-owned land, excluding the noise-affected land referred to in Table 7.

Table 1: Operational noise criteria dB(A)

NAG	Day/Evening/Night	Night
	L _{Aeq} (15 min)	L _{A1} (1 min)
A – C	42	47
D – O	40	47
All other privately-owned residences	35	45

^a The NAGs referred to in Table 1 are shown in Appendix 3.

- B2. Noise generated by the development must be measured in accordance with the relevant requirements and exemptions (including certain meteorological conditions) of the *NSW Industrial Noise Policy* (EPA, 2000). **Error! Reference source not found.** sets out the meteorological conditions under which these criteria apply and the requirements for evaluating compliance with these criteria.
- B3. The noise criteria in Table 1 do not apply if the Applicant has an agreement with the owner/s of the relevant residence or land to exceed the noise criteria, and the Applicant has advised the Department in writing of the terms of this agreement.

APPENDIX 4 NOISE COMPLIANCE ASSESSMENT

Applicable Meteorological Conditions

1. The noise criteria in condition B1 are to apply under all meteorological conditions except the following:
 - (a) where 3°C/100 metres (m) lapse rates have been assessed, then:
 - (i) wind speeds greater than 3 metres/second (m/s) measured at 10m above ground level;
 - (ii) temperature inversion conditions between 1.5°C and 3°C/100m and wind speeds greater than 2m/s measured at 10m above ground level; or
 - (iii) temperature inversion conditions greater than 3°C/100m.
 - (b) where Pasquill Stability Classes have been assessed, then:
 - (i) wind speeds greater than 3m/s at 10m above ground level;
 - (ii) stability category F temperature inversion conditions and wind speeds greater than 2m/s at 10m above ground level; or
 - (iii) stability category G temperature inversion conditions.

Determination of Meteorological Conditions

2. Except for wind speed at microphone height, the data to be used for determining meteorological conditions shall be that recorded by the meteorological station required under condition B28.

Compliance Monitoring

3. Unless otherwise agreed by the Planning Secretary, the attended compliance monitoring must be carried out in accordance with the relevant requirements for reviewing performance set out in the *NSW Industrial Noise Policy* (EPA, 2000), in particular the requirements relating to:
 - (a) monitoring locations for the collection of representative noise data;
 - (b) meteorological conditions during which collection of noise data is not appropriate;
 - (c) equipment used to collect noise data, and conformity with Australian Standards relevant to such equipment; and
 - (d) modifications to noise data collected, including for the exclusion of extraneous noise and/or penalties for modifying factors apart from adjustments for duration,with the exception of applying appropriate modifying factors for low frequency noise during compliance testing. This should be undertaken in accordance with Fact Sheet C of the *NSW Noise Policy for Industry* (EPA, 2017).

ASIA PACIFIC OFFICES

BRISBANE

Level 2, 15 Astor Terrace
Spring Hill QLD 4000
Australia
T: +61 7 3858 4800
F: +61 7 3858 4801

MACKAY

21 River Street
Mackay QLD 4740
Australia
T: +61 7 3181 3300

SYDNEY

2 Lincoln Street
Lane Cove NSW 2066
Australia
T: +61 2 9427 8100
F: +61 2 9427 8200

AUCKLAND

68 Beach Road
Auckland 1010
New Zealand
T: +64 27 441 7849

CANBERRA

GPO 410
Canberra ACT 2600
Australia
T: +61 2 6287 0800
F: +61 2 9427 8200

MELBOURNE

Suite 2, 2 Domville Avenue
Hawthorn VIC 3122
Australia
T: +61 3 9249 9400
F: +61 3 9249 9499

TOWNSVILLE

Level 1, 514 Sturt Street
Townsville QLD 4810
Australia
T: +61 7 4722 8000
F: +61 7 4722 8001

NELSON

6/A Cambridge Street
Richmond, Nelson 7020
New Zealand
T: +64 274 898 628

DARWIN

Unit 5, 21 Parap Road
Parap NT 0820
Australia
T: +61 8 8998 0100
F: +61 8 9370 0101

NEWCASTLE

10 Kings Road
New Lambton NSW 2305
Australia
T: +61 2 4037 3200
F: +61 2 4037 3201

TOWNSVILLE SOUTH

12 Cannan Street
Townsville South QLD 4810
Australia
T: +61 7 4772 6500

GOLD COAST

Level 2, 194 Varsity Parade
Varsity Lakes QLD 4227
Australia
M: +61 438 763 516

PERTH

Ground Floor, 503 Murray Street
Perth WA 6000
Australia
T: +61 8 9422 5900
F: +61 8 9422 5901

WOLLONGONG

Level 1, The Central Building
UoW Innovation Campus
North Wollongong NSW 2500
Australia
T: +61 404 939 922